

# Measurement of the neutron fraction event-by-event in DREAM

We have measured the neutron fraction event-by-event in beam test data taken at CERN by the DREAM collaboration. I will review these measurements in the context of the importance of neutrons to future high-precision calorimetry, and I will bring together the data from SPACAL, the GLD compensating calorimeter, and DREAM to estimate the impact neutron fraction measurements will make on hadronic energy resolution and hadronic particle identification in dual-readout calorimeters.

John Hauptman  
CALOR 10, Beijing, China  
10-14 May 2010

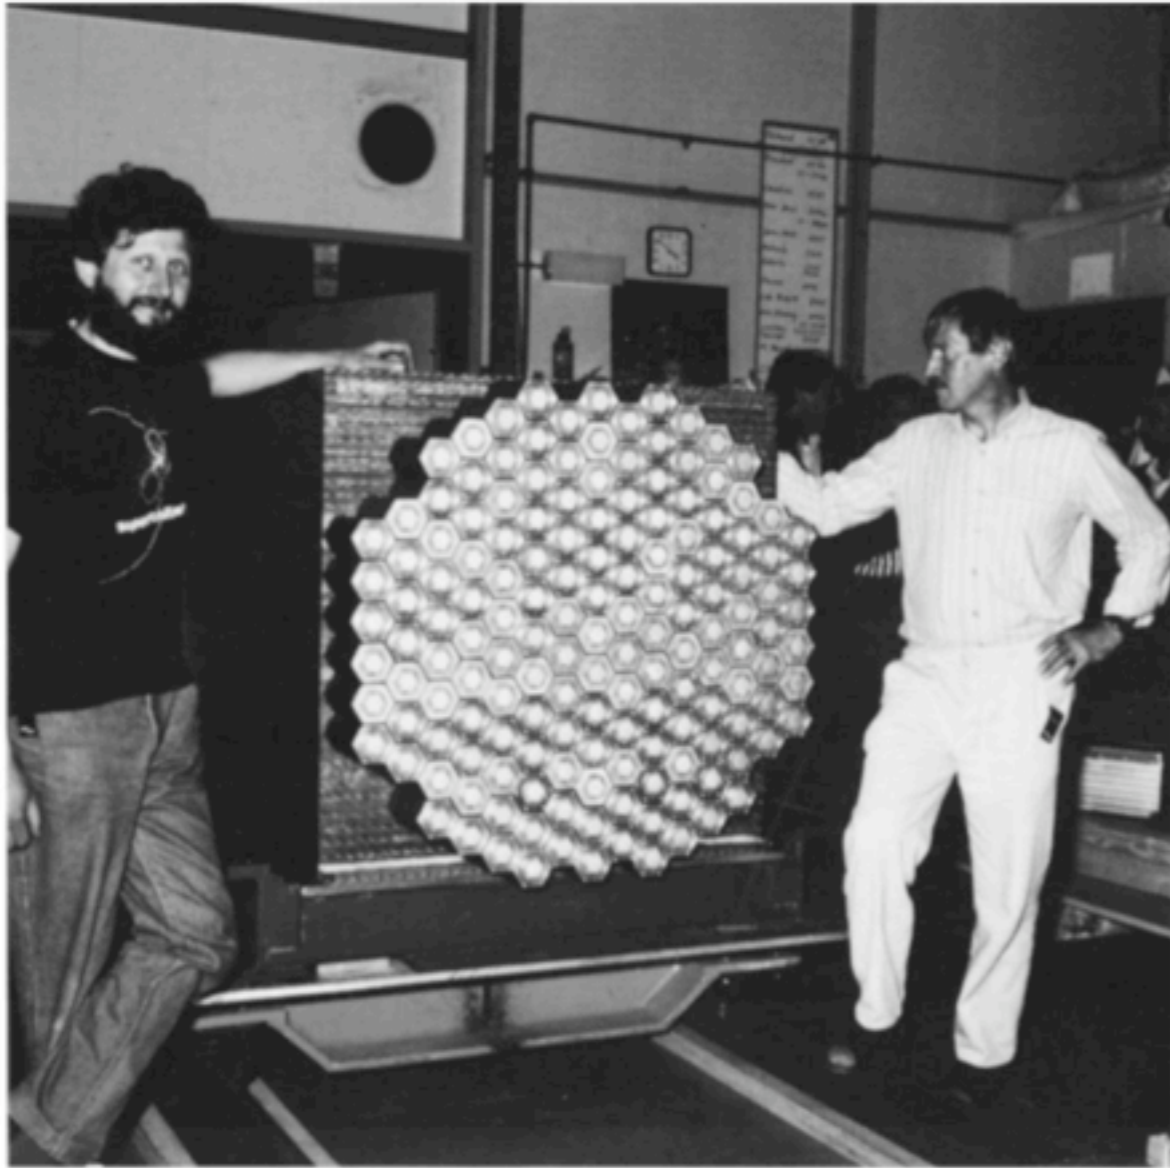


FIG. 1. SPACAL detector built at CERN as a research and development project for detectors at a multi-TeV proton-proton collider. This calorimeter consists of scintillating plastic fibers embedded in a lead matrix at a volume ratio 4:1, needed for compensation. In total 176,855 fibers, bunched together in 155 hexagonal towers, were used to build this 13-ton, 9.5 nuclear interaction lengths deep detector. Each tower is read out by one photomultiplier. The fibers are running longitudinally, that is in the direction of the incoming particles.

## SPACAL: (1991)

$\pi$  break up nuclei, lose BE/nucleon

$n$  liberated from nuclei are slow and fill a large volume

Pb:scint in 4:1 ratio is about right for  $np \rightarrow np$  scatters to make *hadron* and *electron* response equal

compensation:  $e/h=1$

Huge fluctuations between  $\pi^0 \rightarrow \gamma\gamma$  and  $\pi^+/\pi^-$  no longer matter.



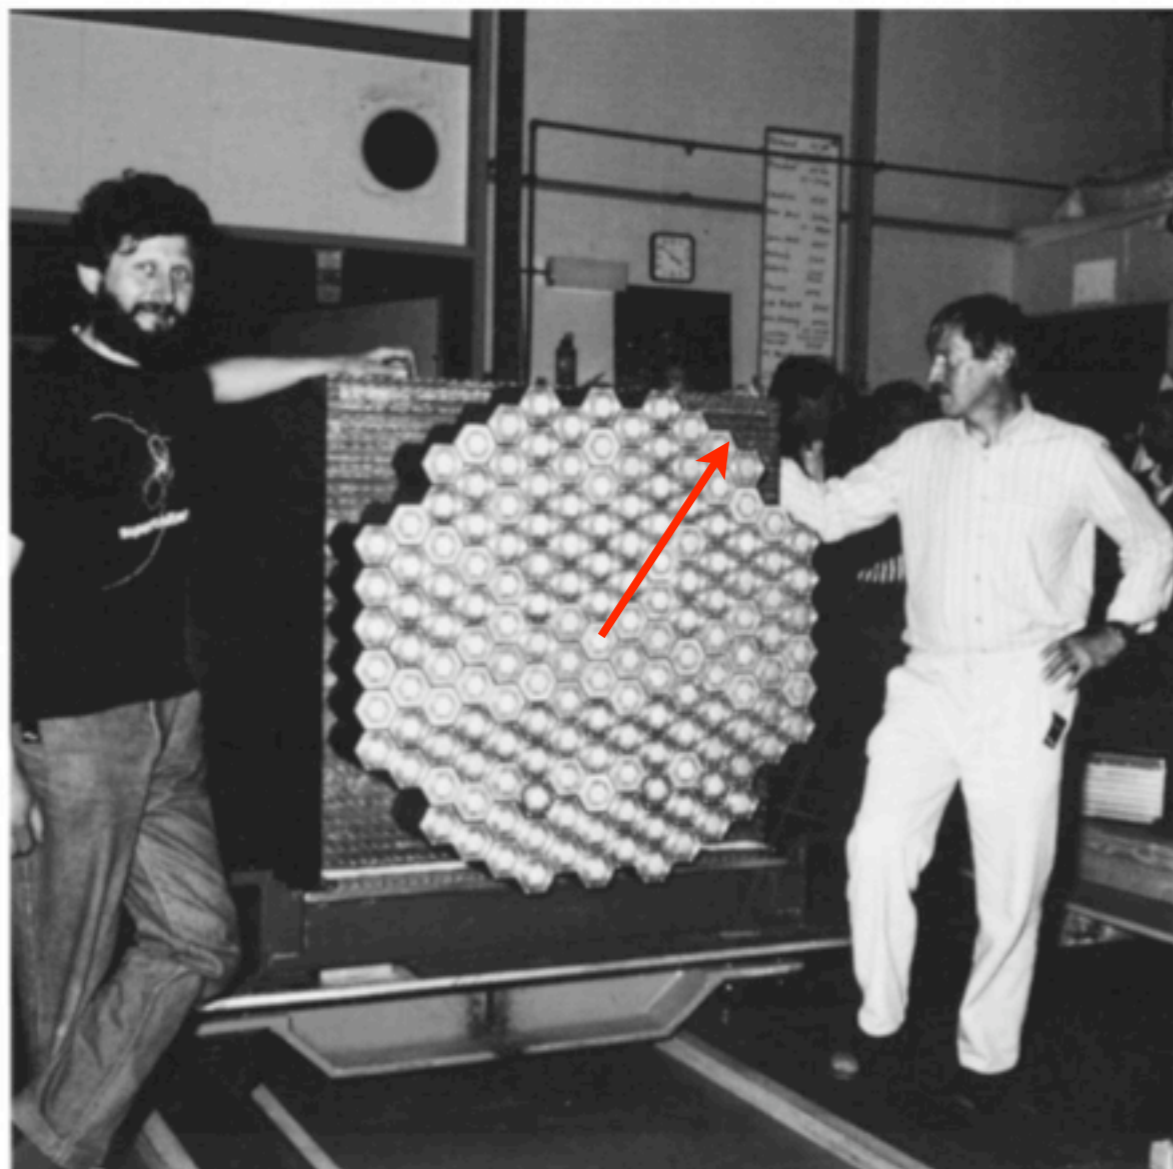


FIG. 1. SPACAL detector built at CERN as a research and development project for detectors at a multi-TeV proton-proton collider. This calorimeter consists of scintillating plastic fibers embedded in a lead matrix at a volume ratio 4:1, needed for compensation. In total 176,855 fibers, bunched together in 155 hexagonal towers, were used to build this 13-ton, 9.5 nuclear interaction lengths deep detector. Each tower is read out by one photomultiplier. The fibers are running longitudinally, that is in the direction of the incoming particles.



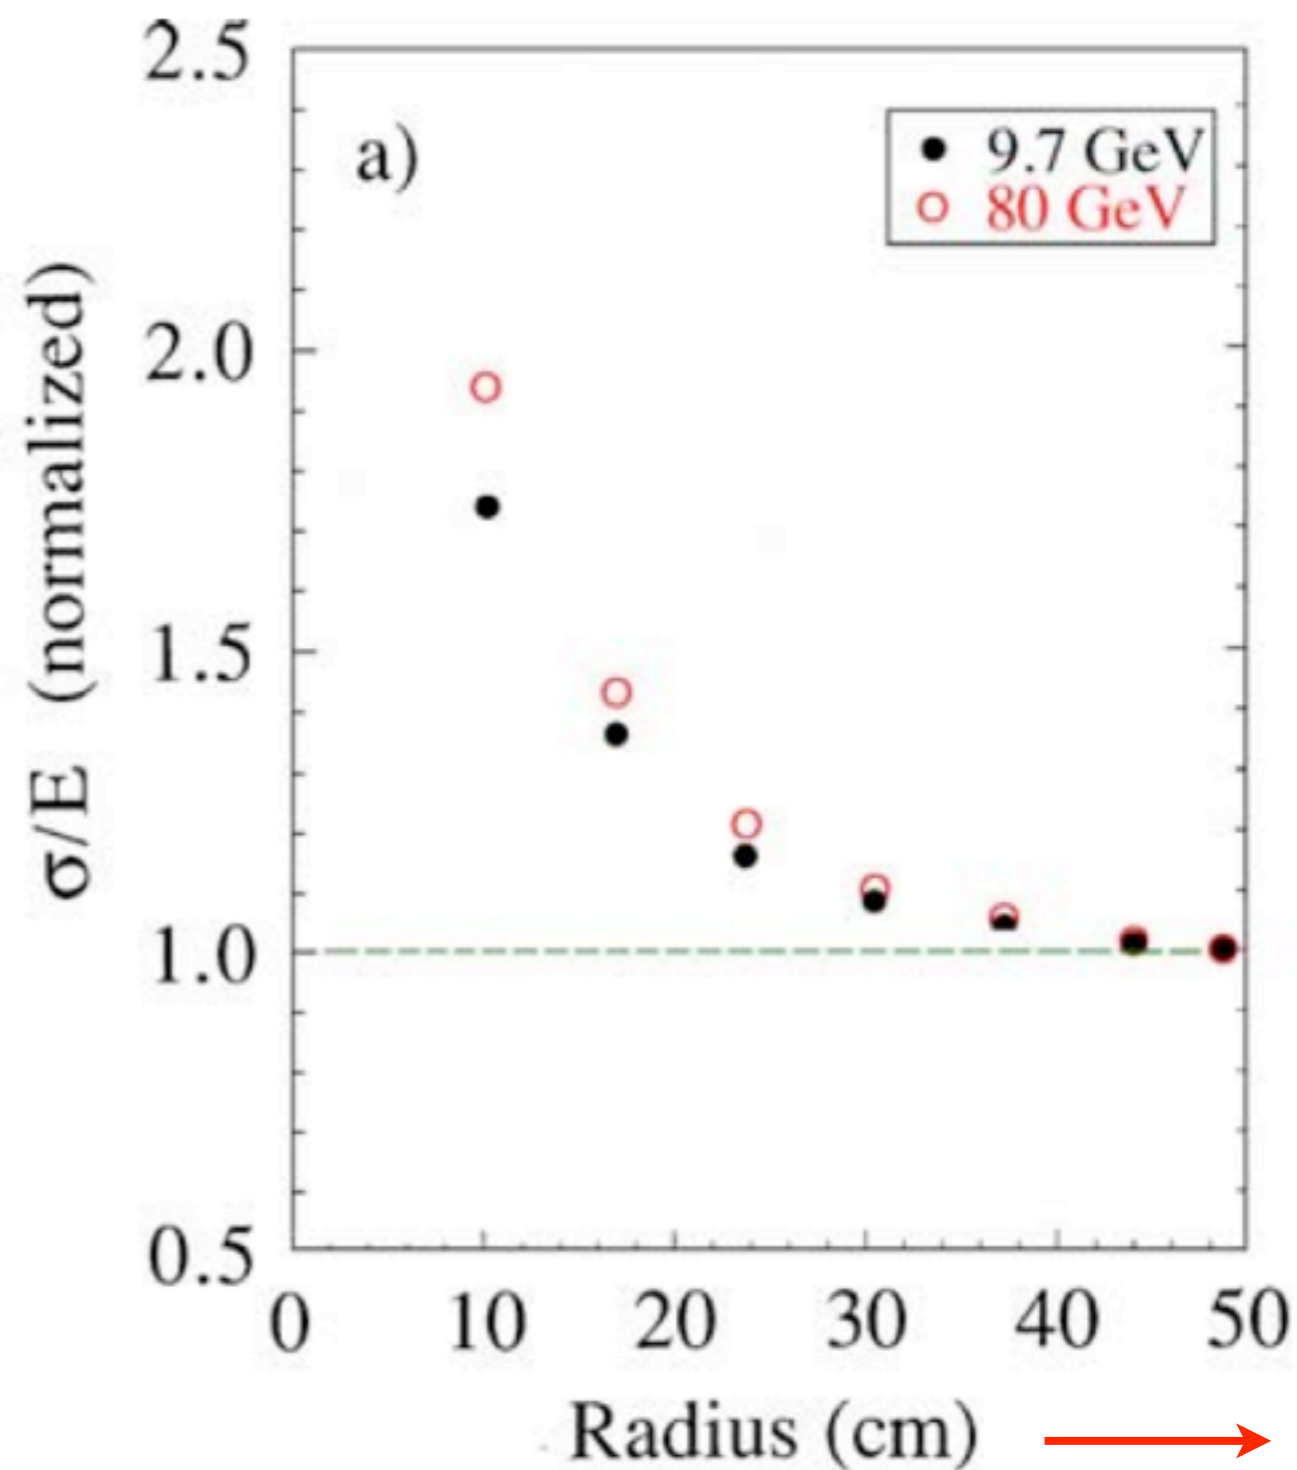

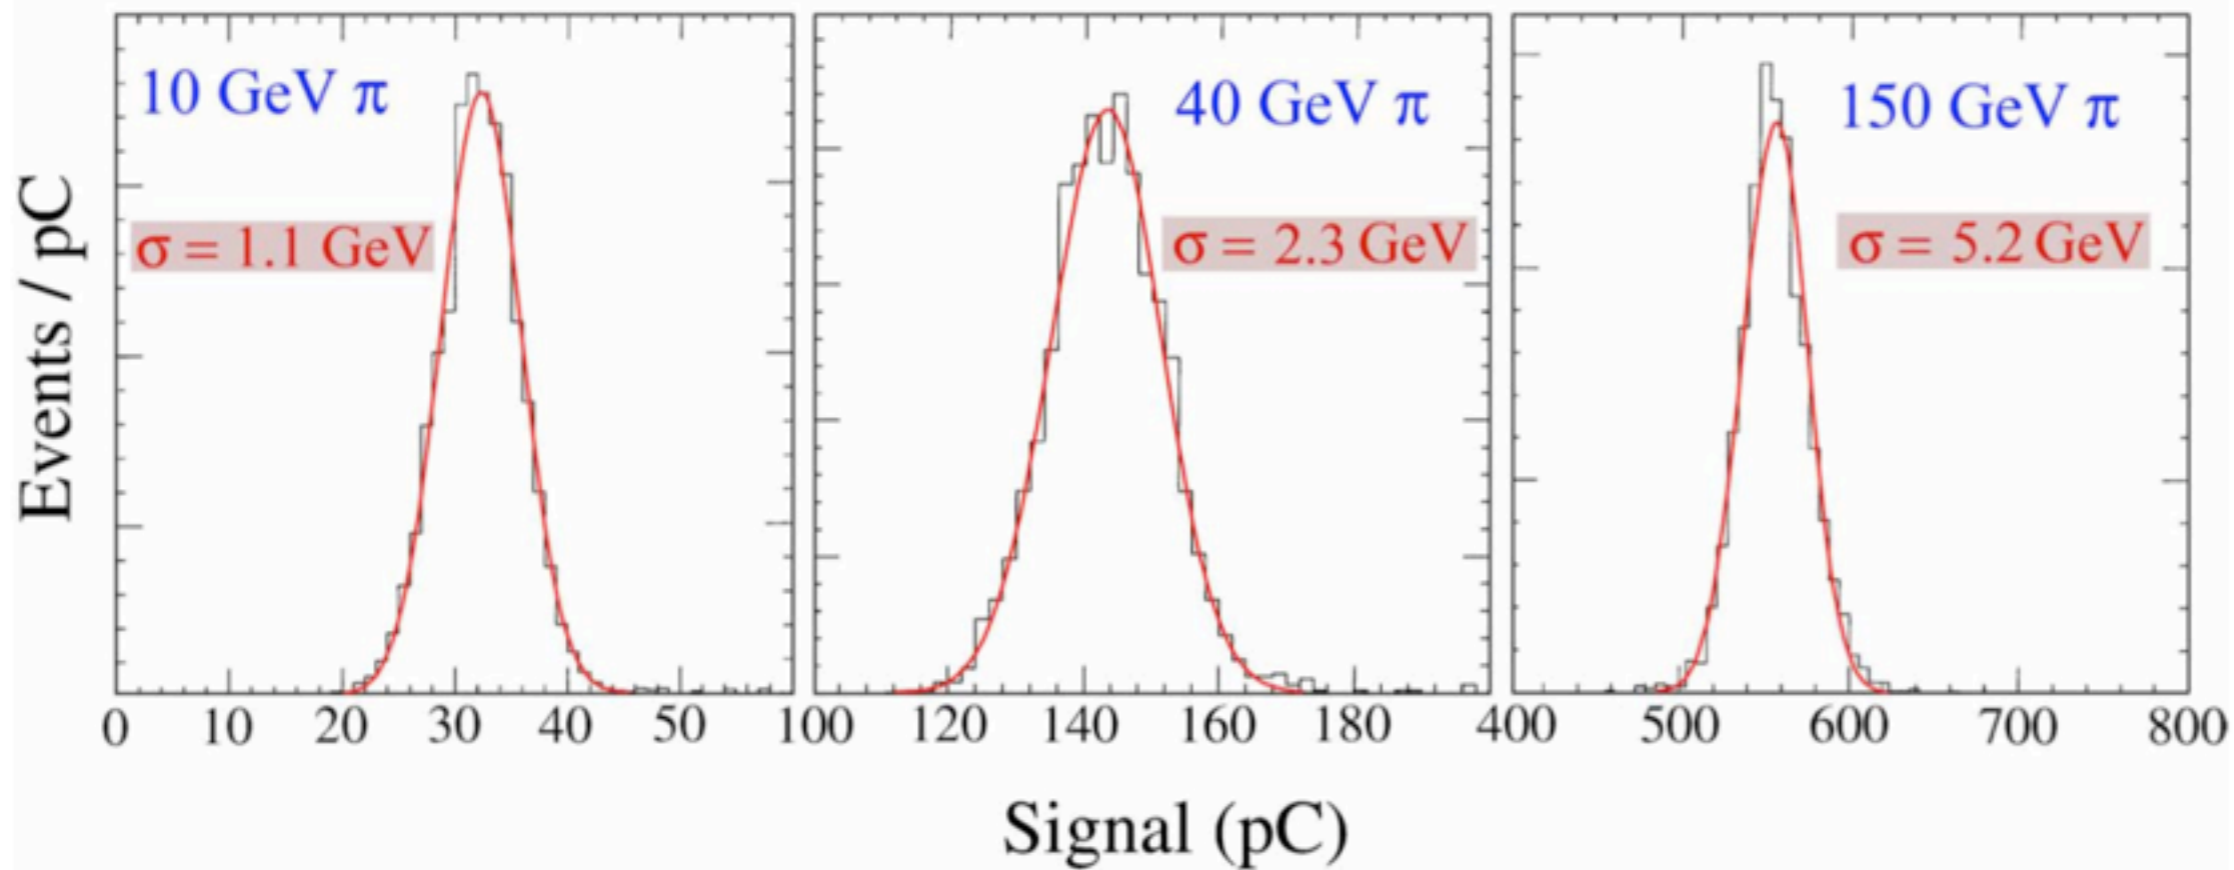

from: NIM A308 (1991) 481

## SPACAL

Best resolution *ever*  
achieved  
(this was a long time ago)





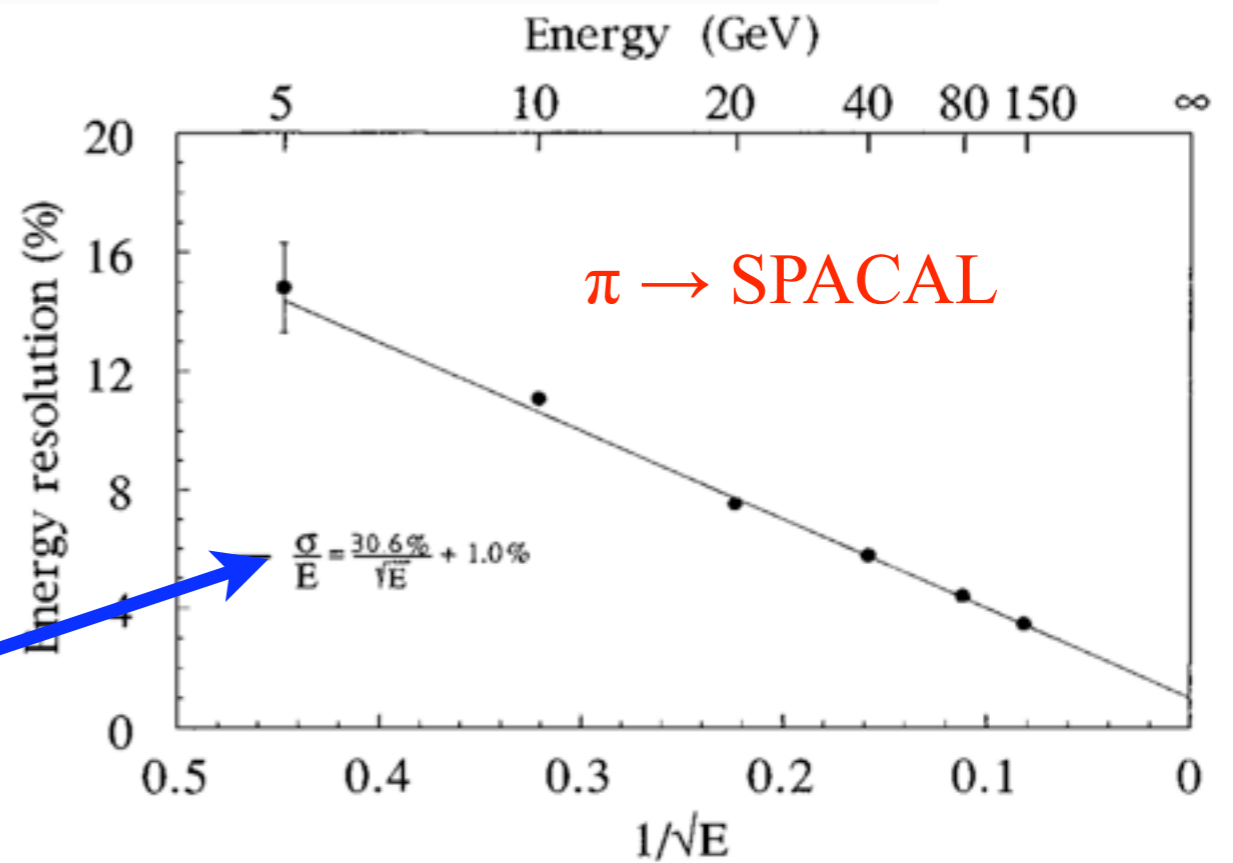






FIG. 10. Hadronic energy resolution as a function of energy, for the compensating SPACAL lead/plastic-scintillator calorimeter (Ref. 16).

More recently, the **GLD** concept detector:

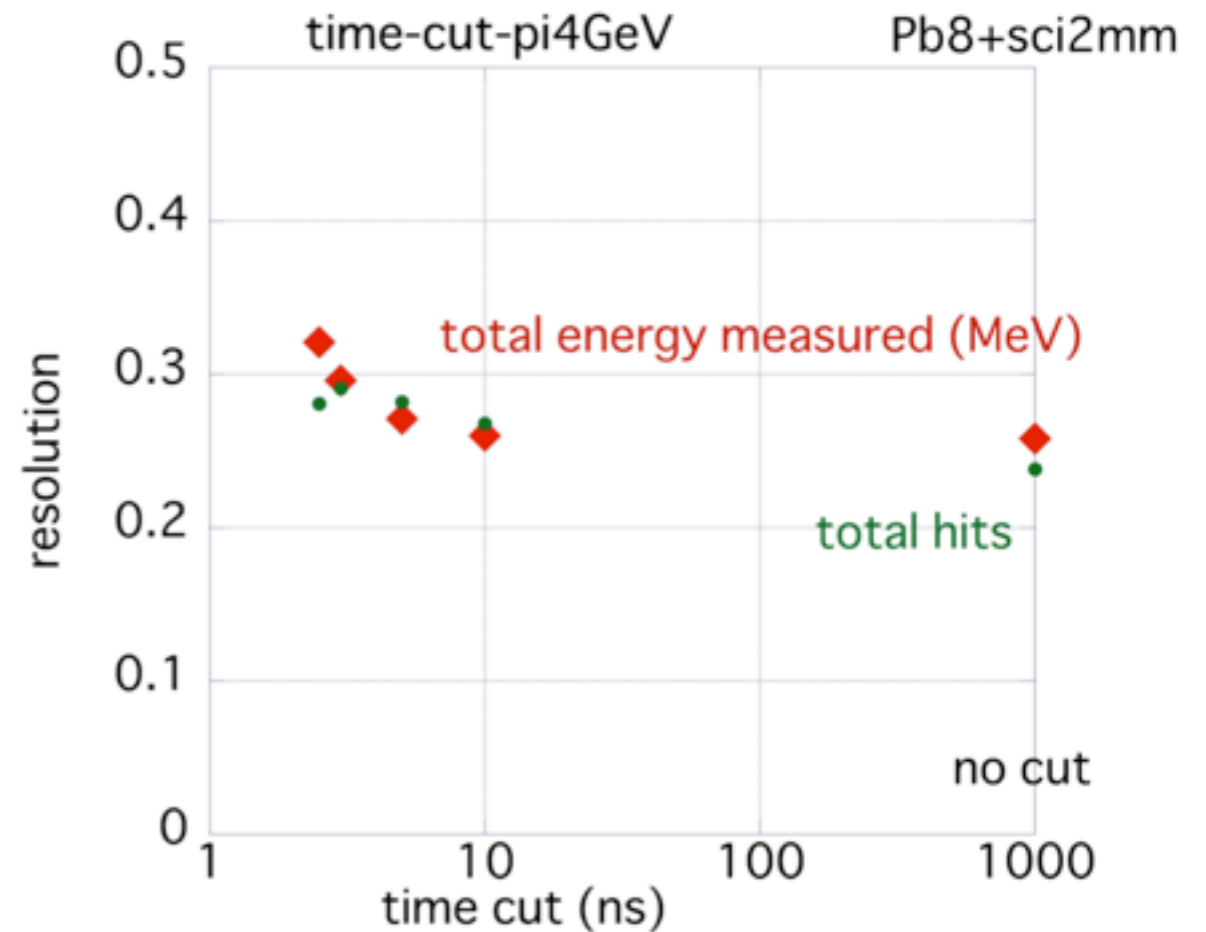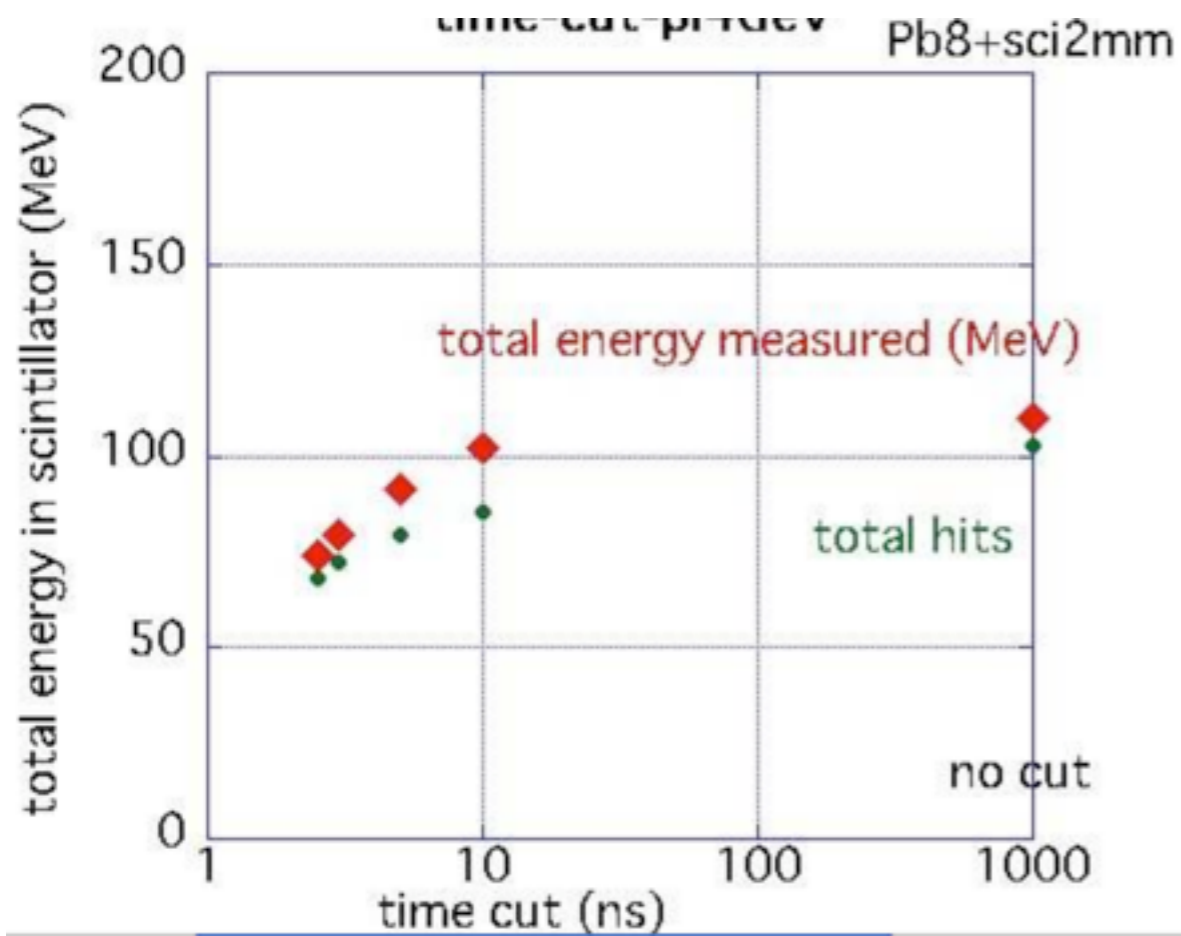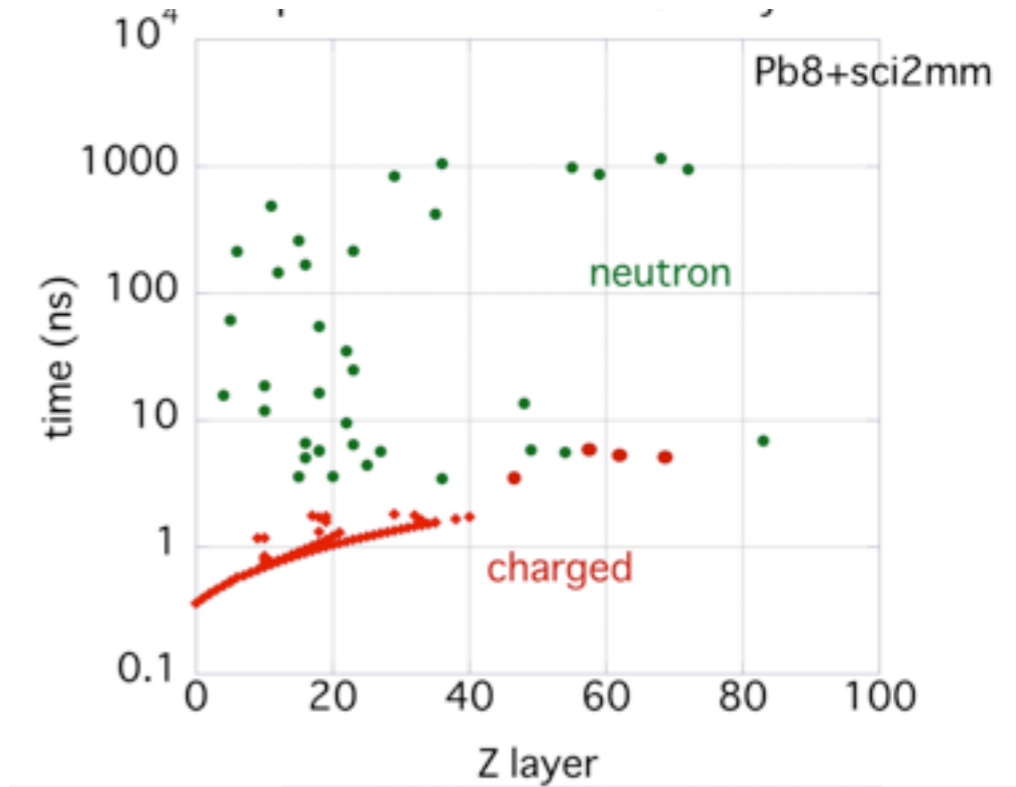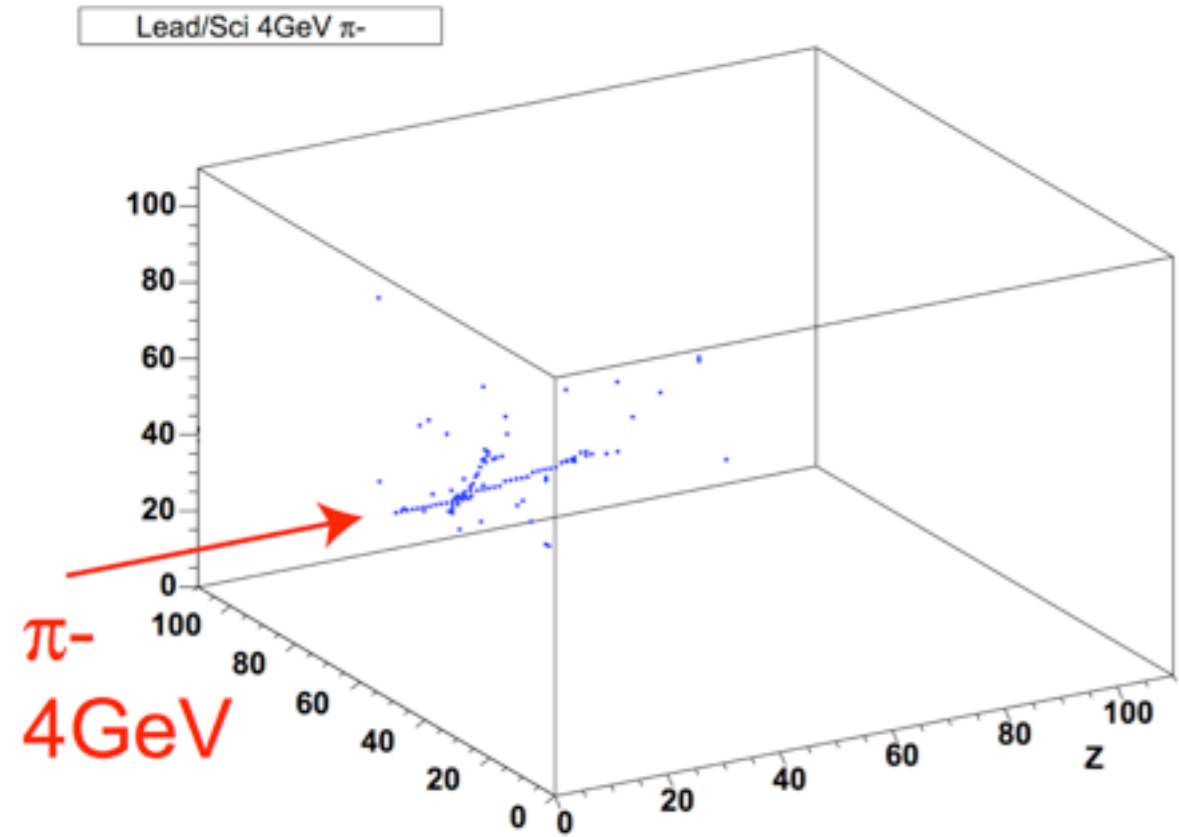

Tuning  $e/h$

results

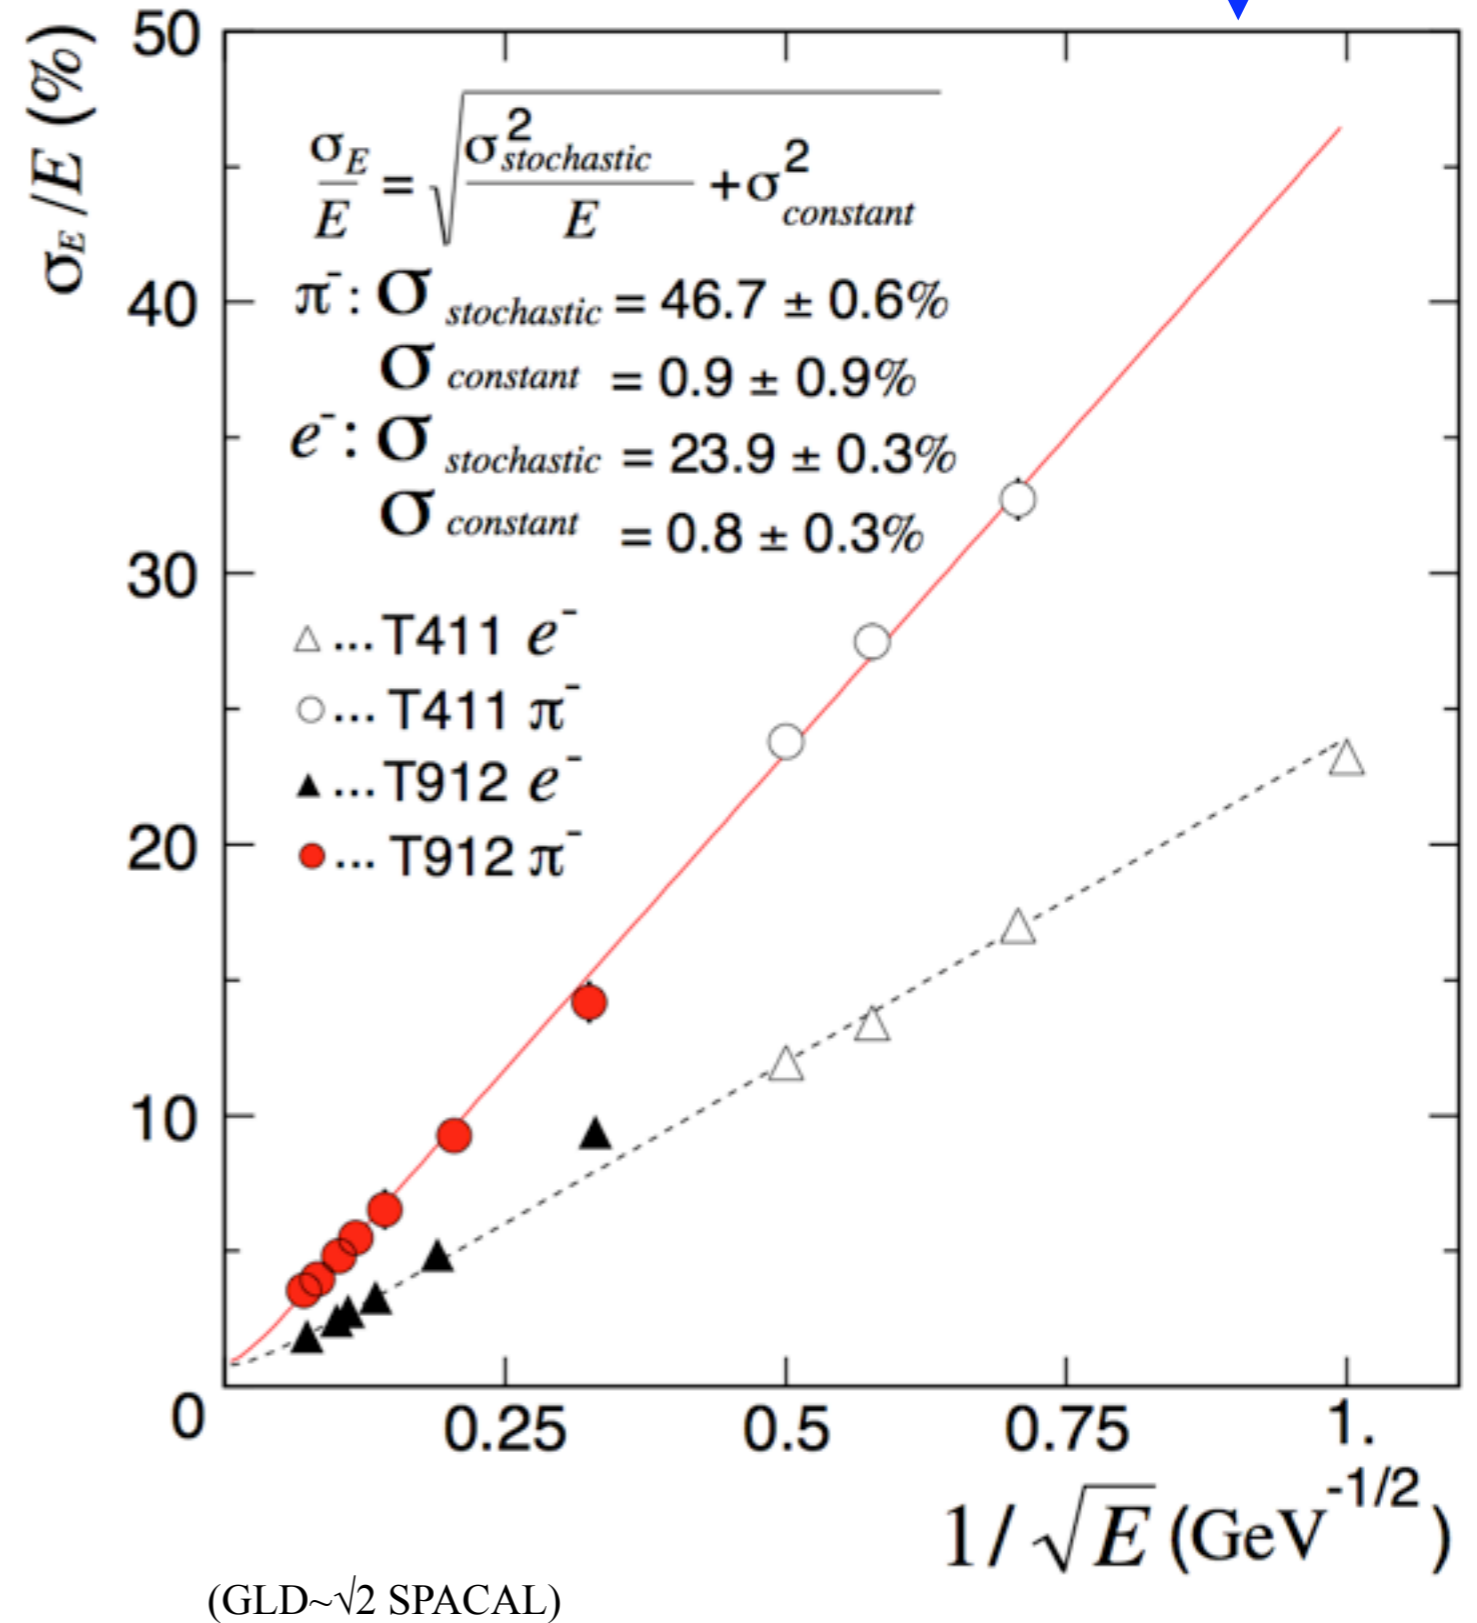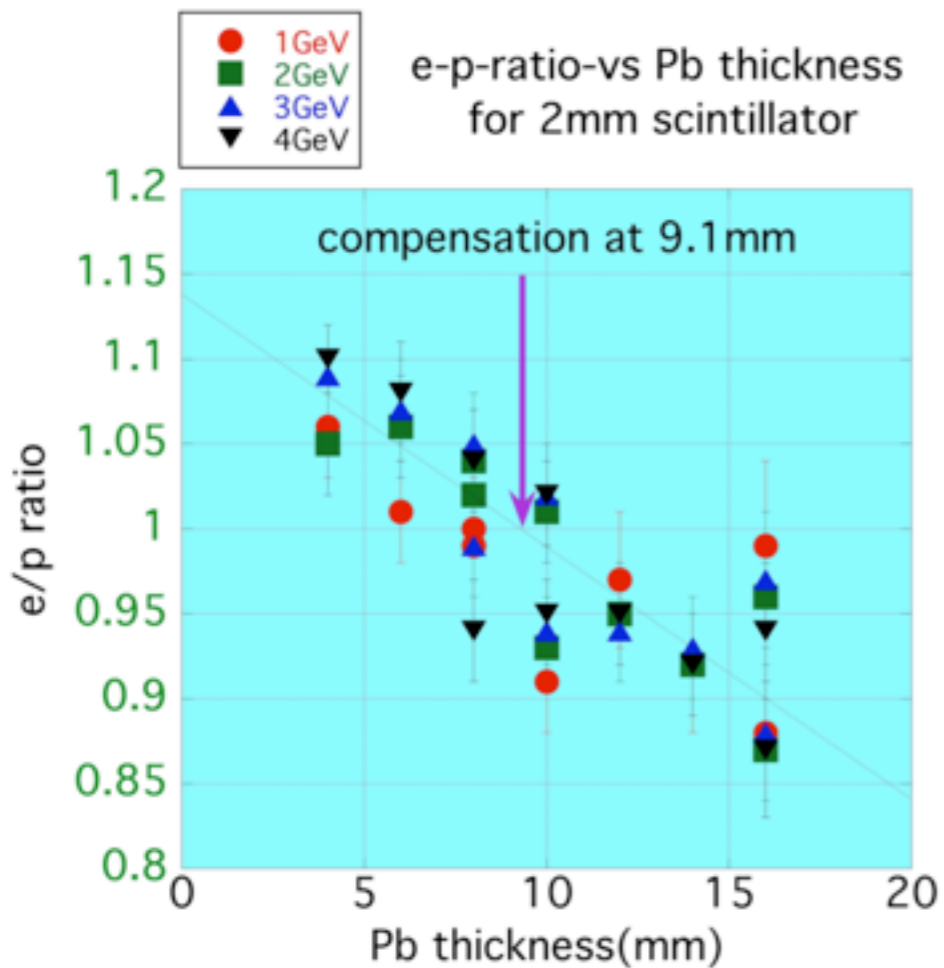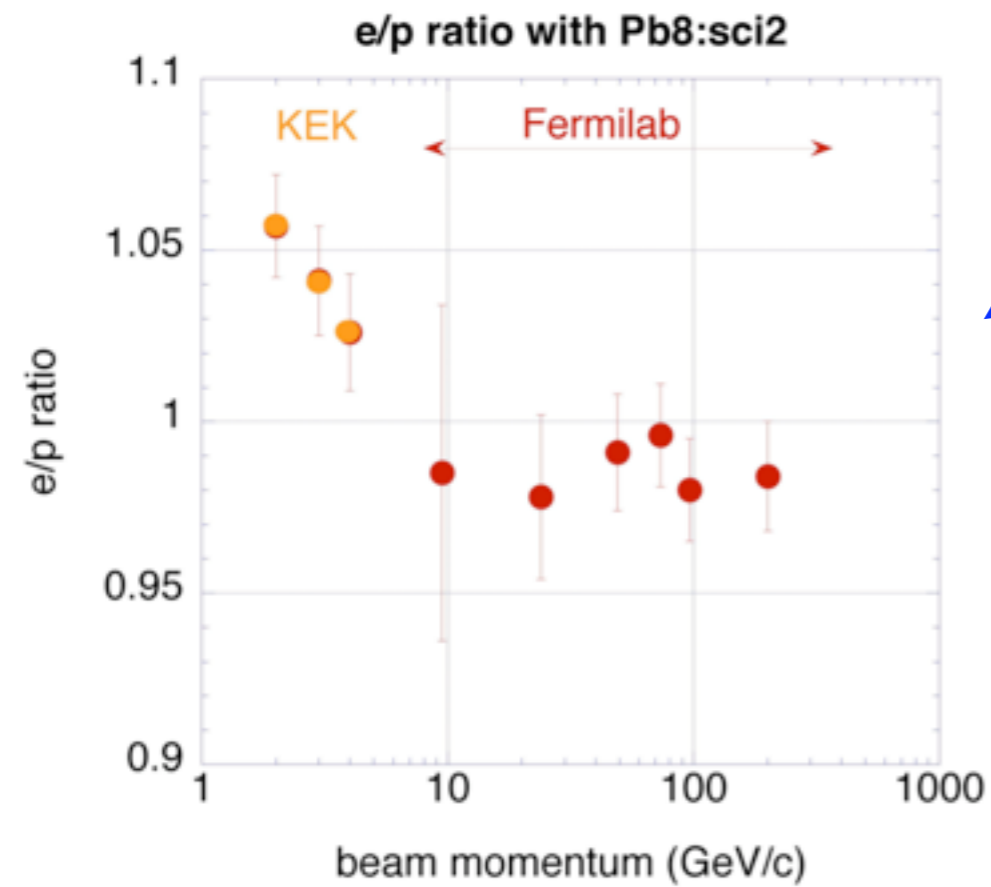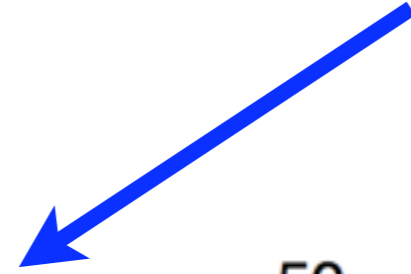

# Compensation (*via $np \rightarrow np$* )

## Advantages

- same energy scale for electrons, hadrons, jets, muons
- excellent hadronic energy resolution
- Gaussian response function
- linearity in hadronic energy
- understood: no mysteries left

## Disadvantages


- fixed sampling fraction (Pb:scint=4:1)
- small sampling fraction (2.4%) limits EM resolution

## Dual-readout allows “dynamic compensation”

- any sampling fraction, any absorber, almost any geometry
- retain all the advantages of compensation



DREAM: Structure

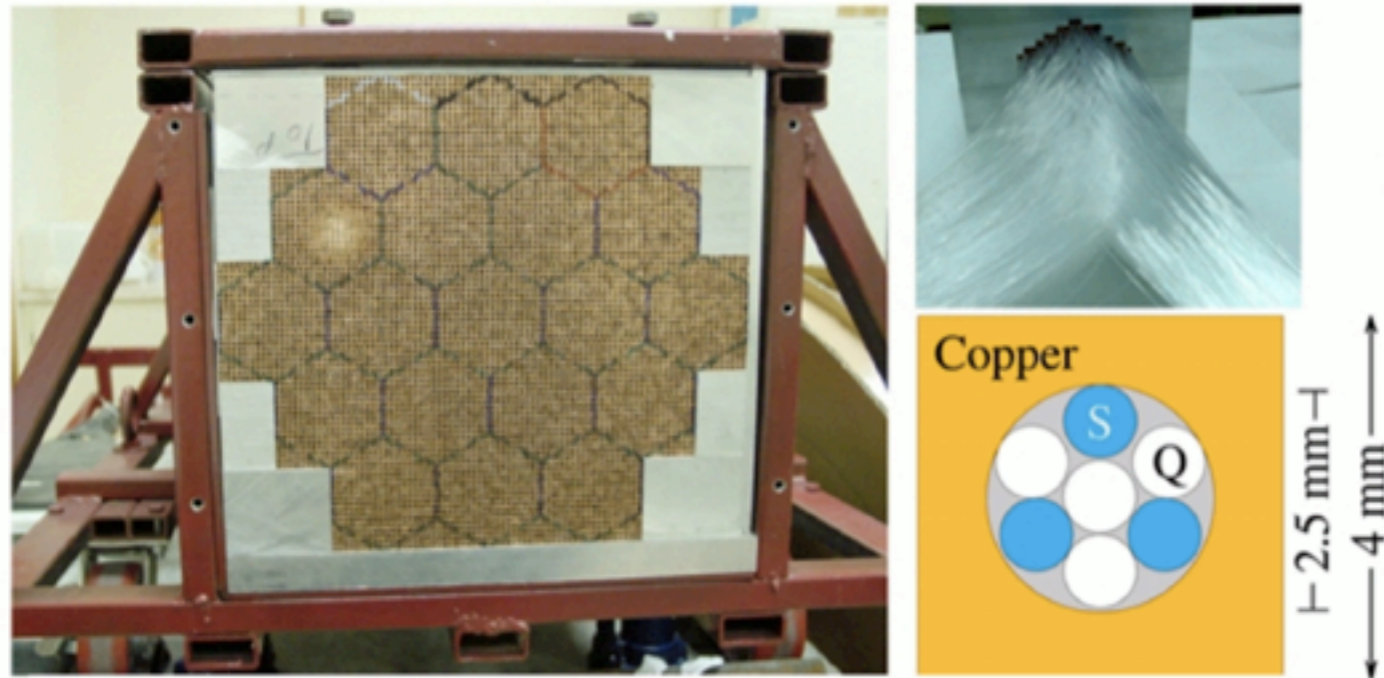


## DREAM: Dual-REAdout Module

*test the principle with a simple module*

- *Some characteristics of the DREAM detector*

- **Depth** 200 cm ( $10.0 \lambda_{\text{int}}$ )
- Effective **radius** 16.2 cm ( $0.81 \lambda_{\text{int}}$ ,  $8.0 \rho_M$ )
- **Mass** instrumented volume 1030 kg
- Number of **fibers** 35910, diameter 0.8 mm, total length  $\approx 90$  km
- Hexagonal **towers** (19), each read out by 2 PMTs

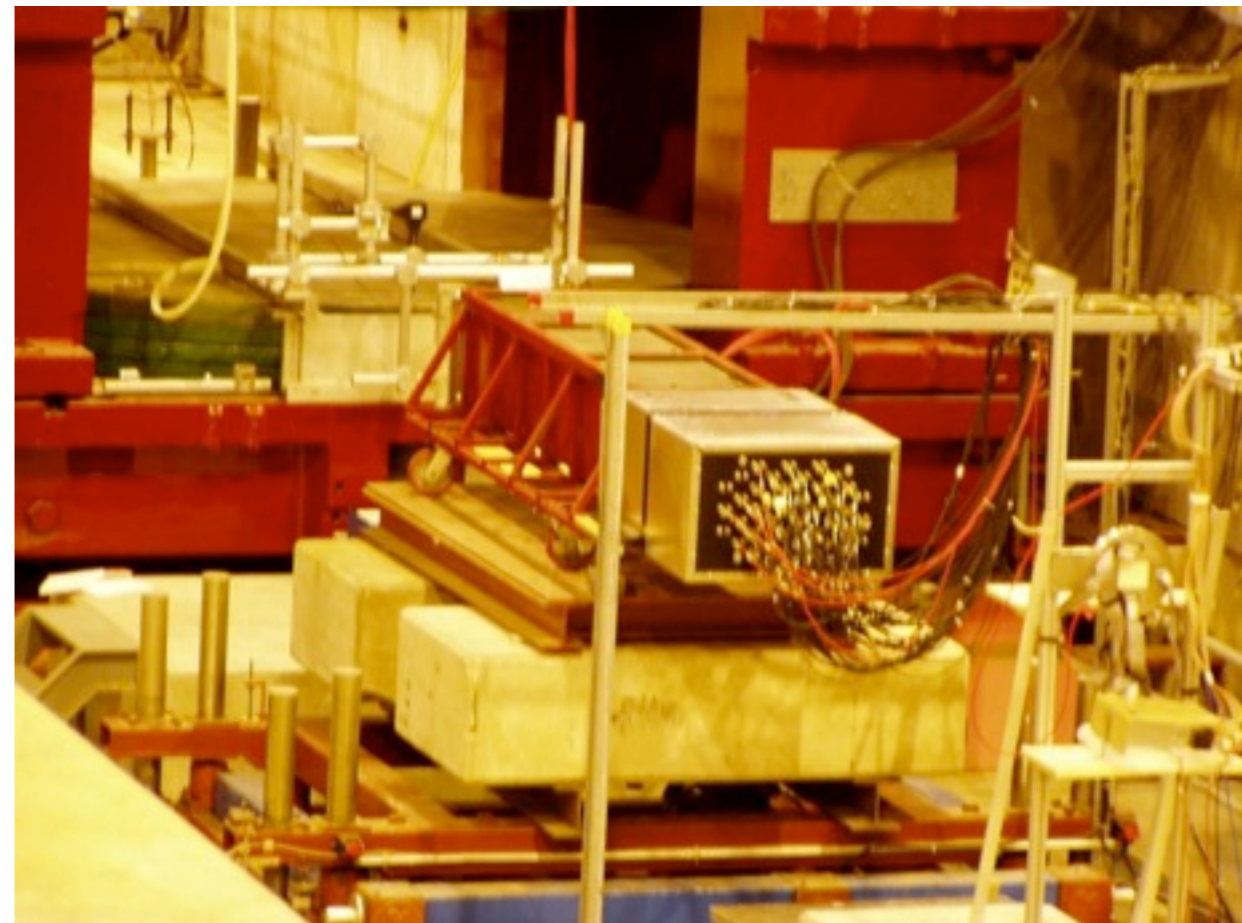




# Reconfigure DREAM module



DAQ was 1 GHz 4-chan  
digital storage scope

transfer to counting house in  
fast air-core cables

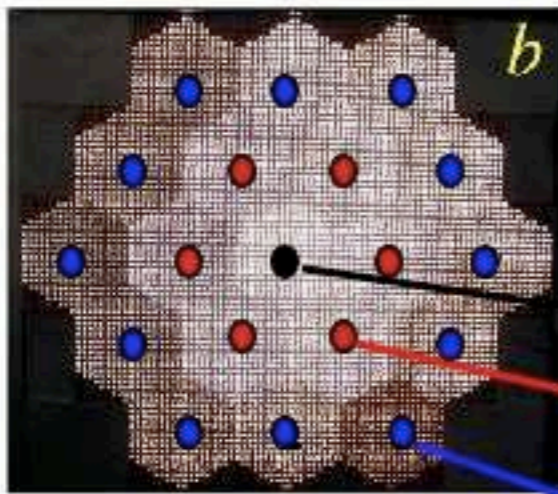

*Scintillating fibers*

“Fast 1” S central

“Fast 2” S inner ring

“Fast 3” S outer ring

*Cerenkov fibers*

1● + 6● + 9● → “Fast 4” Cerenk sum

S central


S inner

S outer


Cer sum

50 GeV  $e^-$   
scope traces


Run 1919 50 GeV  $e^-$

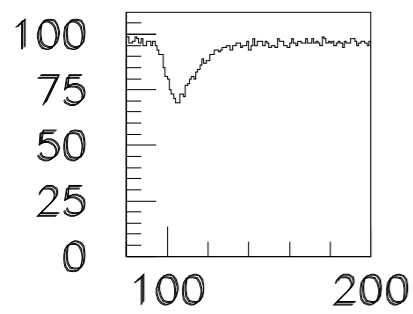


$e^-$  S0(t)

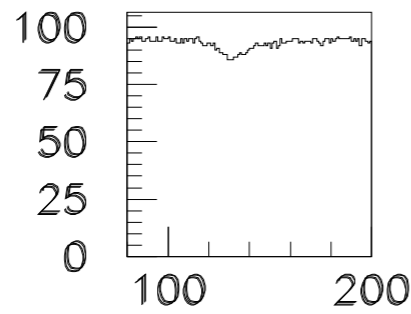

$e^-$  S1(t)

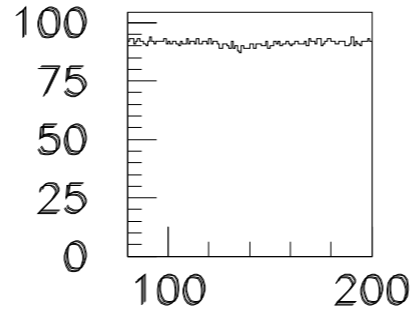


$e^-$  S2(t)

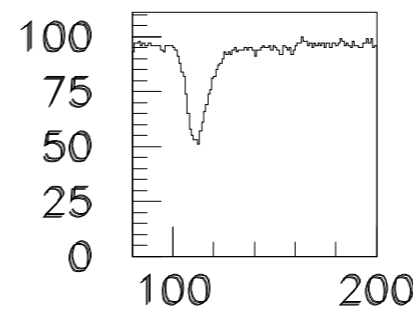


$e^-$  Ch(t)


event #1

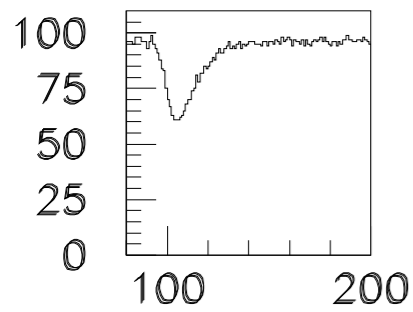


$e^-$  S0(t)

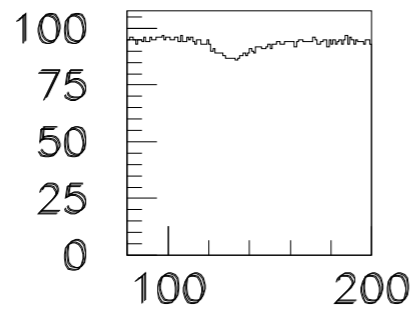

$e^-$  S1(t)

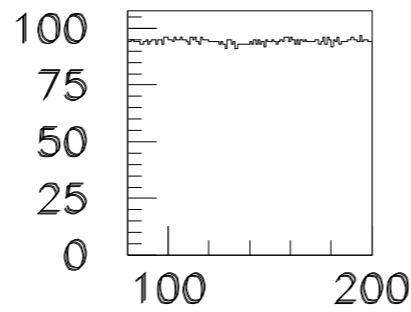


$e^-$  S2(t)

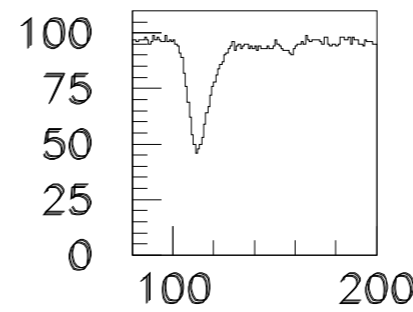


$e^-$  Ch(t)


event #2

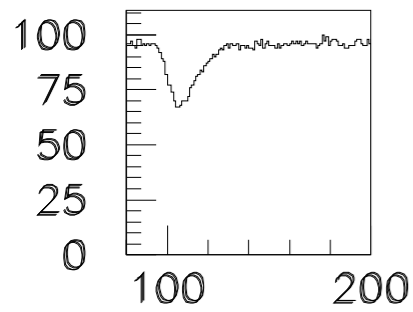


$e^-$  S0(t)

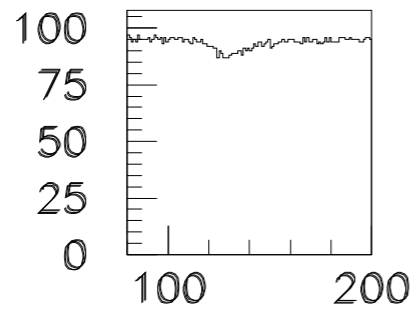

$e^-$  S1(t)

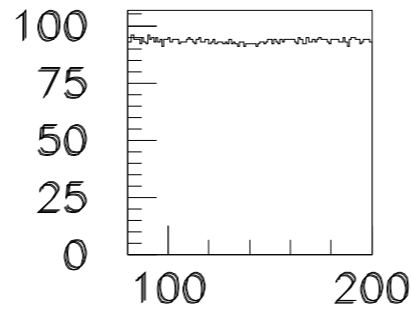


$e^-$  S2(t)

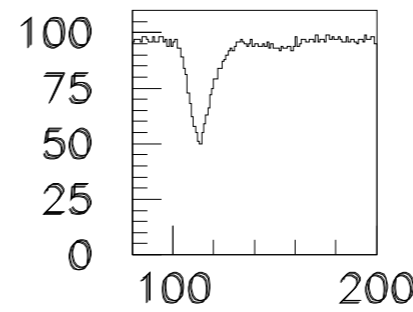


$e^-$  Ch(t)


event #3

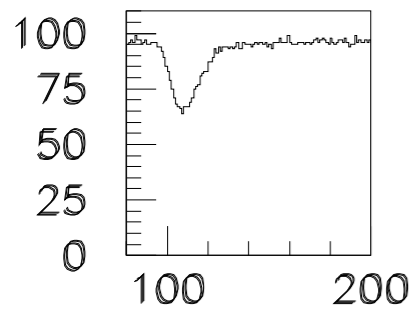


$e^-$  S0(t)

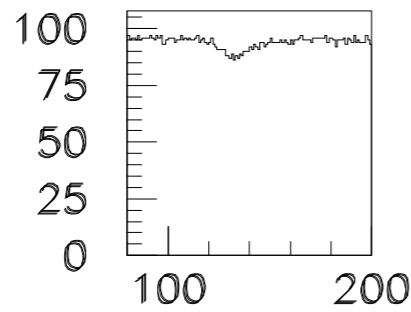

$e^-$  S1(t)

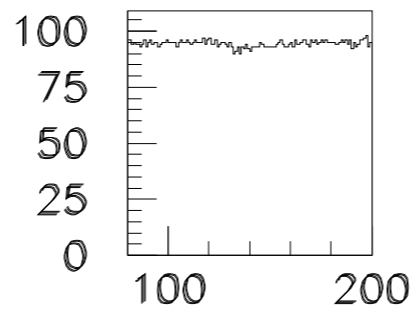

$e^-$  S2(t)

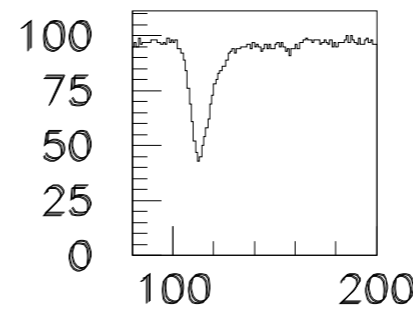

$e^-$  Ch(t)

event #4

(clearly  
electrons)

# 300 GeV $\pi^-$ scope traces


event #1

event #2


event #3

event #4

(clearly pions)

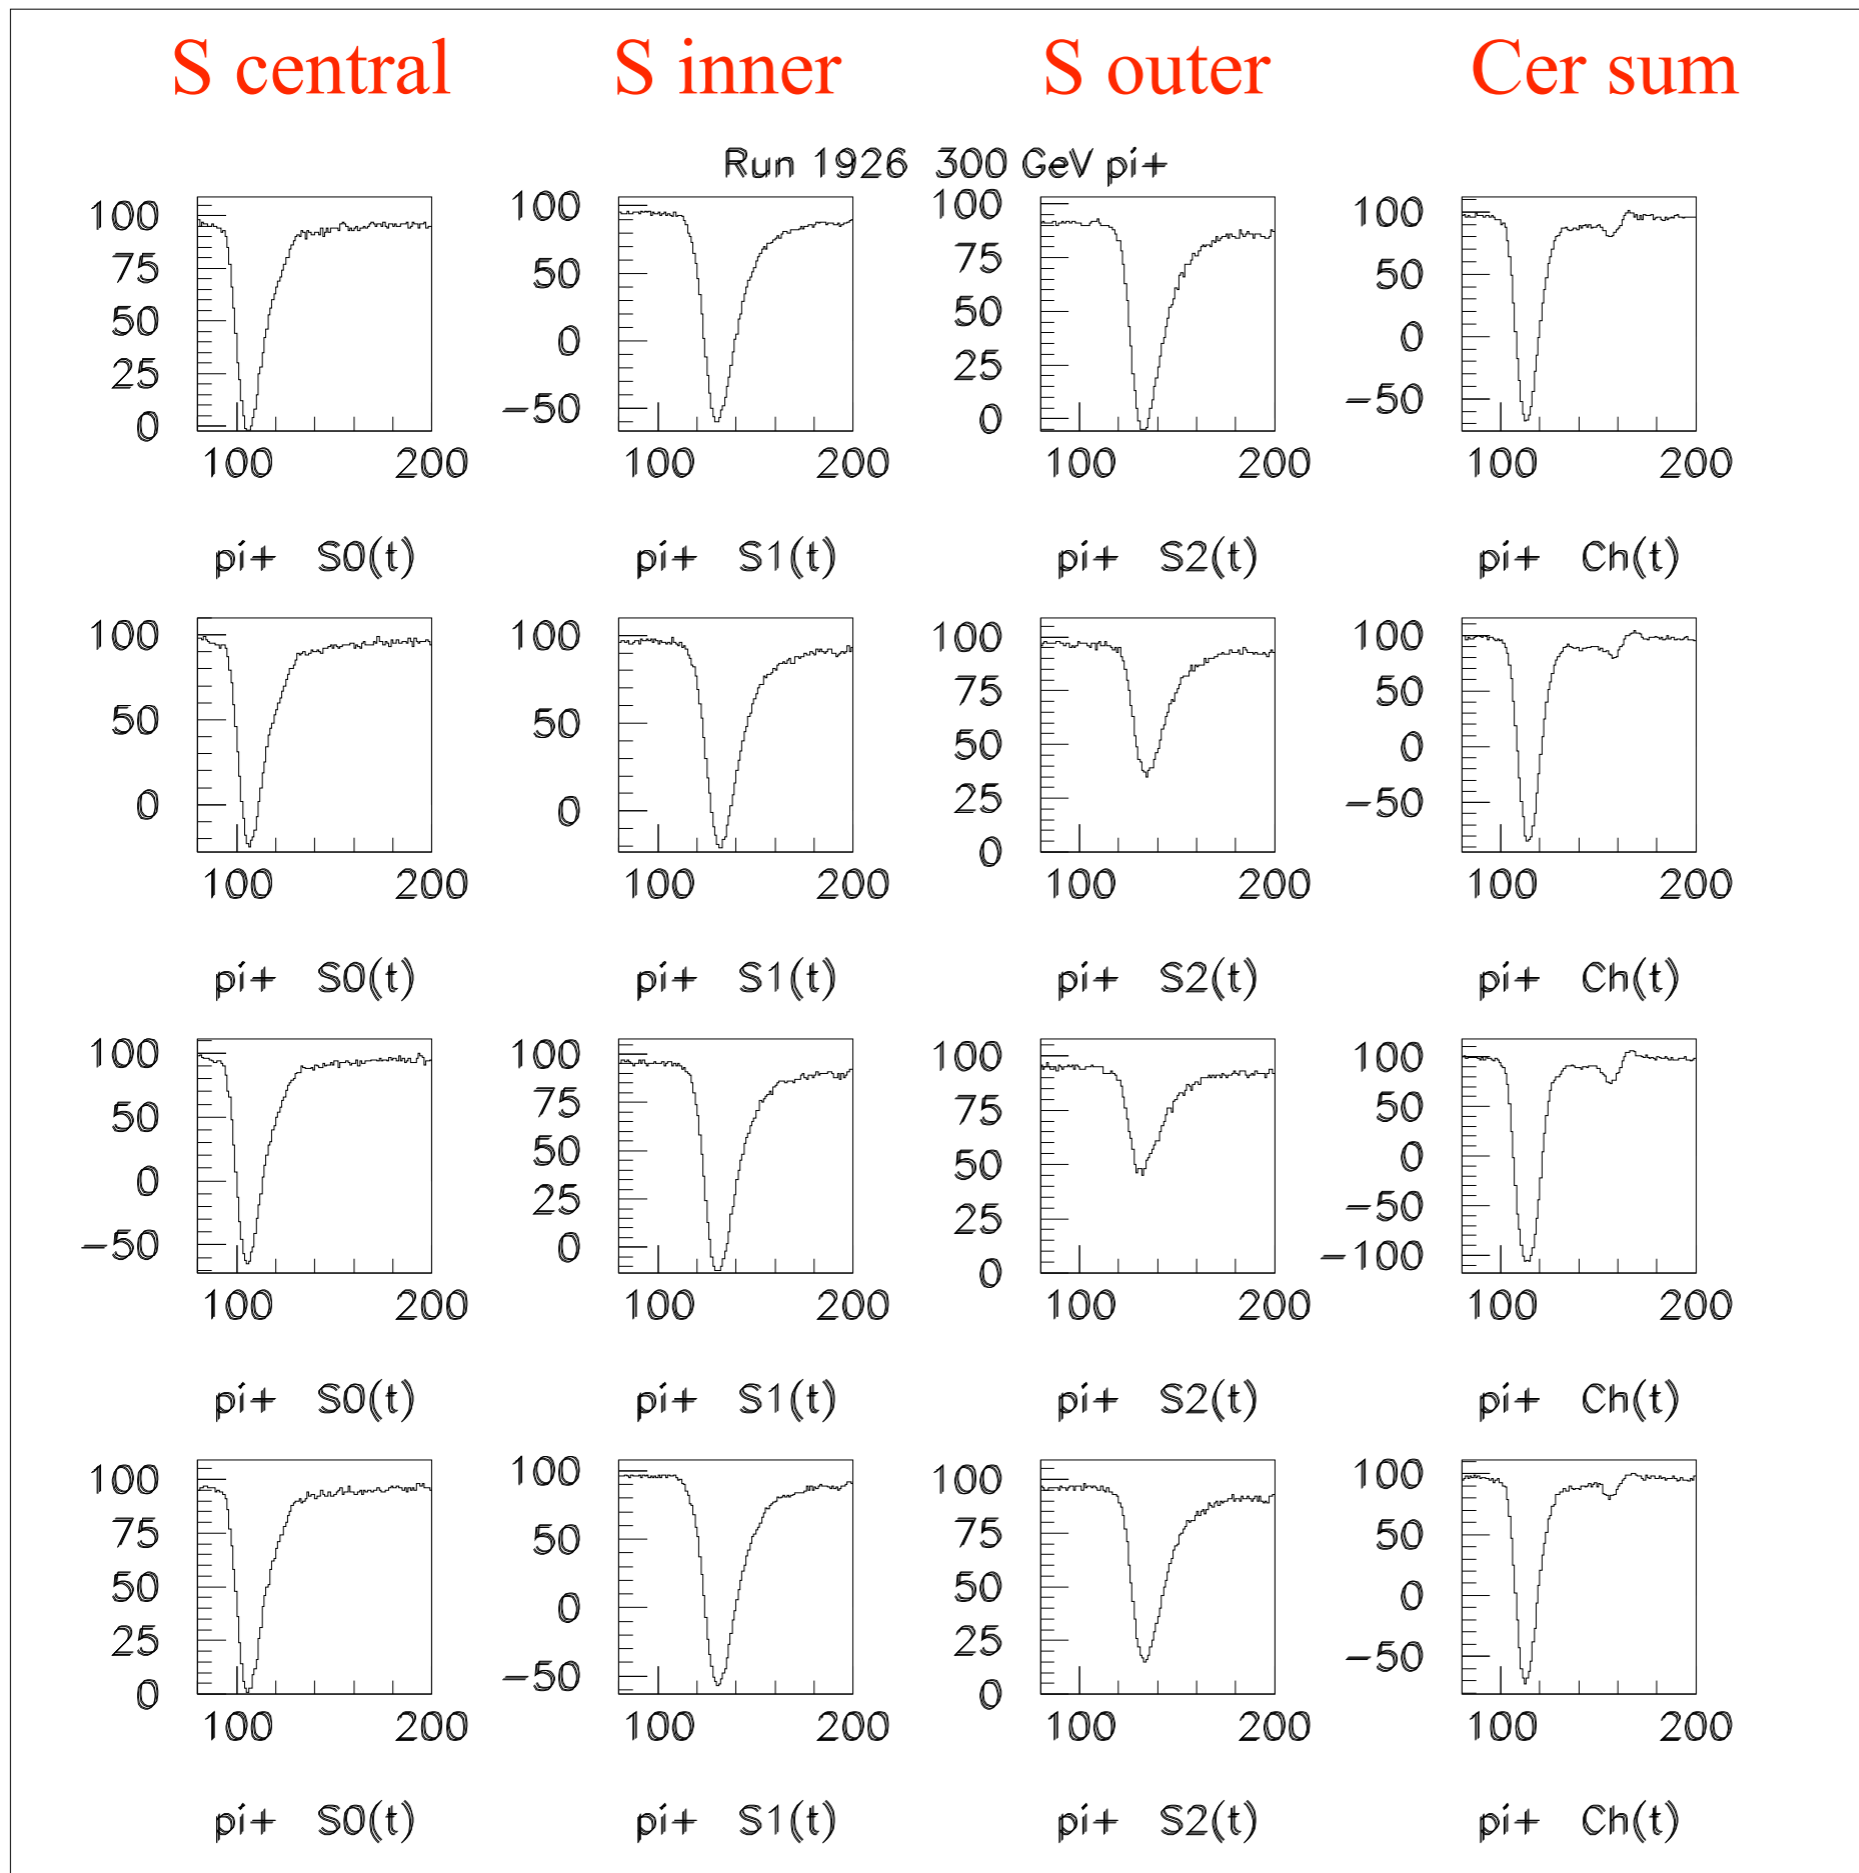




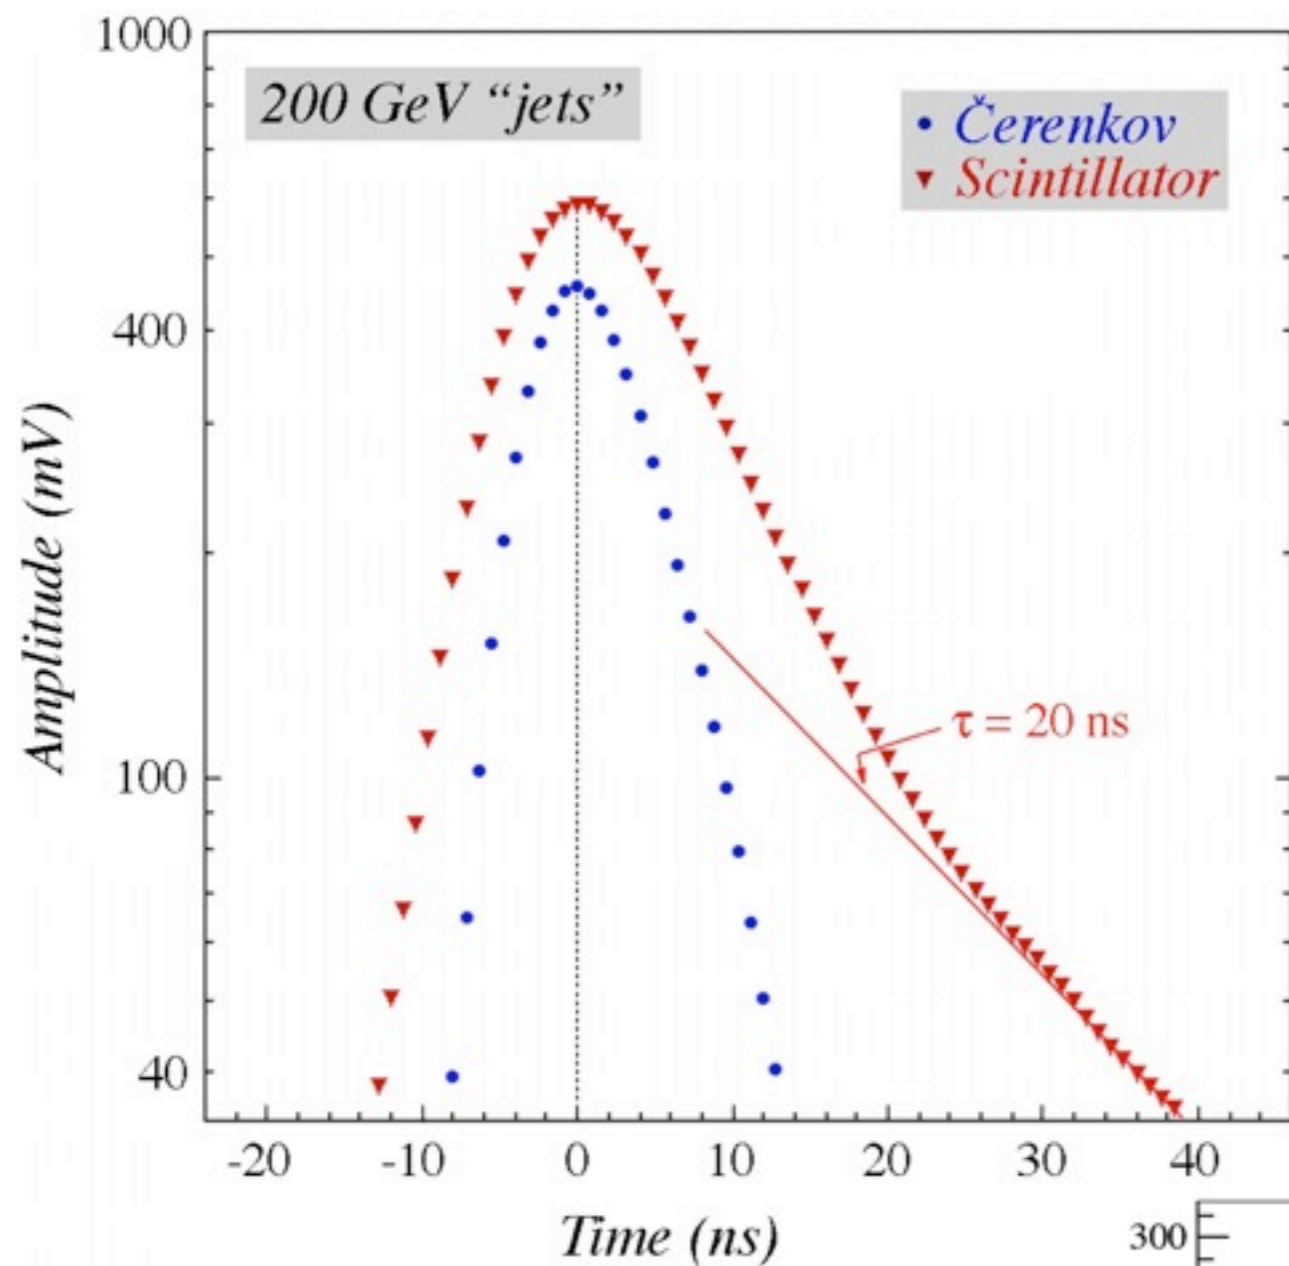


Scintillating fibers see late neutrons by  $np \rightarrow np$


$S_n$  is integral of Scint pulse over 20-40 ns

$$f_n = S_n / S_{tot}$$

Čerenkov fibers do not see neutrons

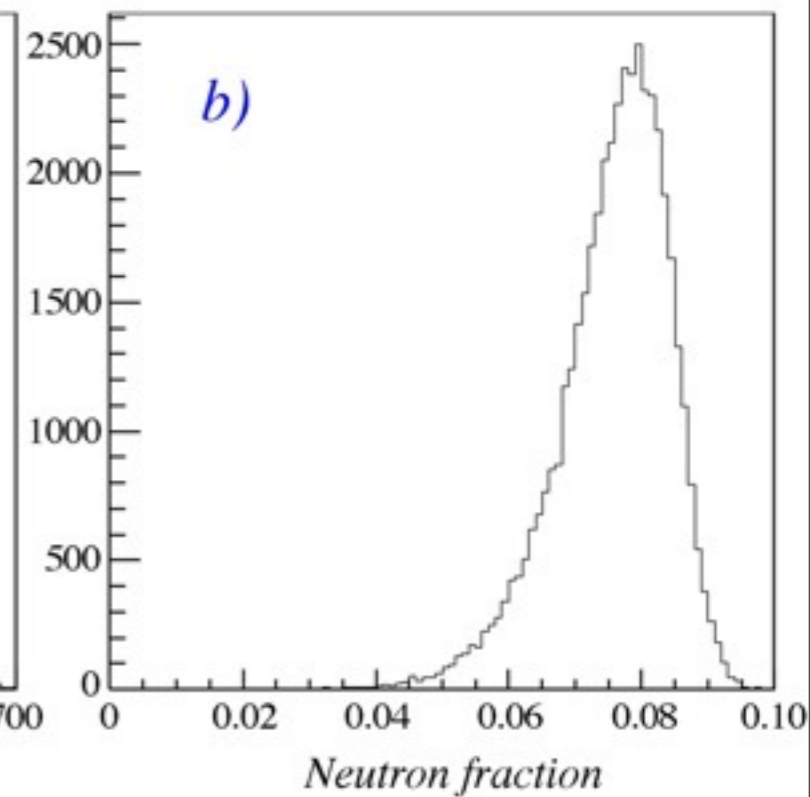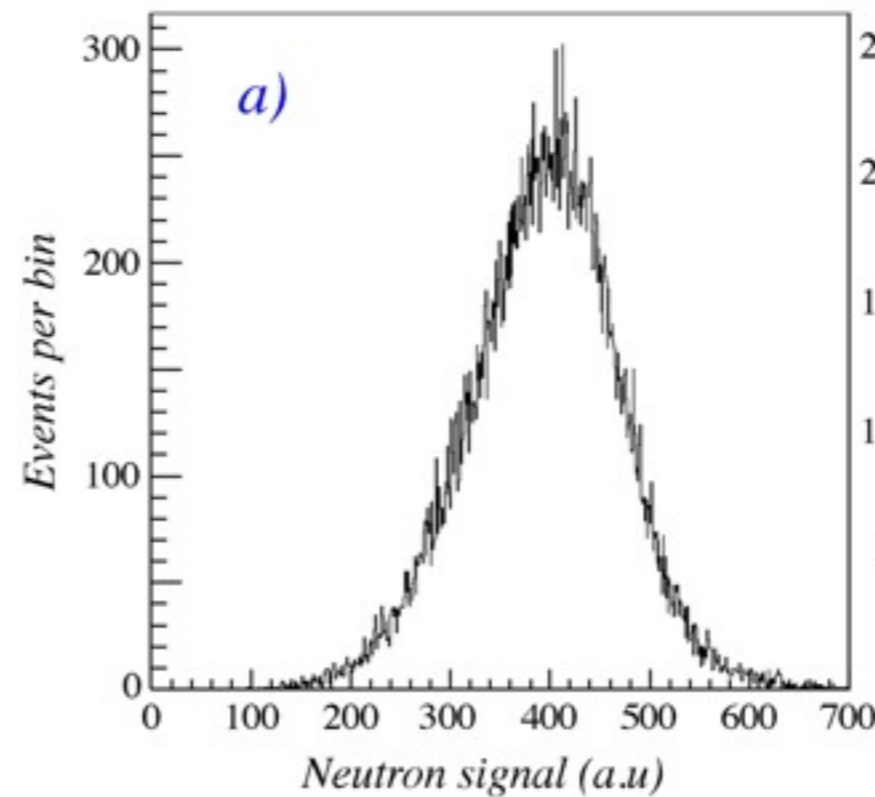



Is it physical? Yes, anti-correlated with  $f_{EM}$ .

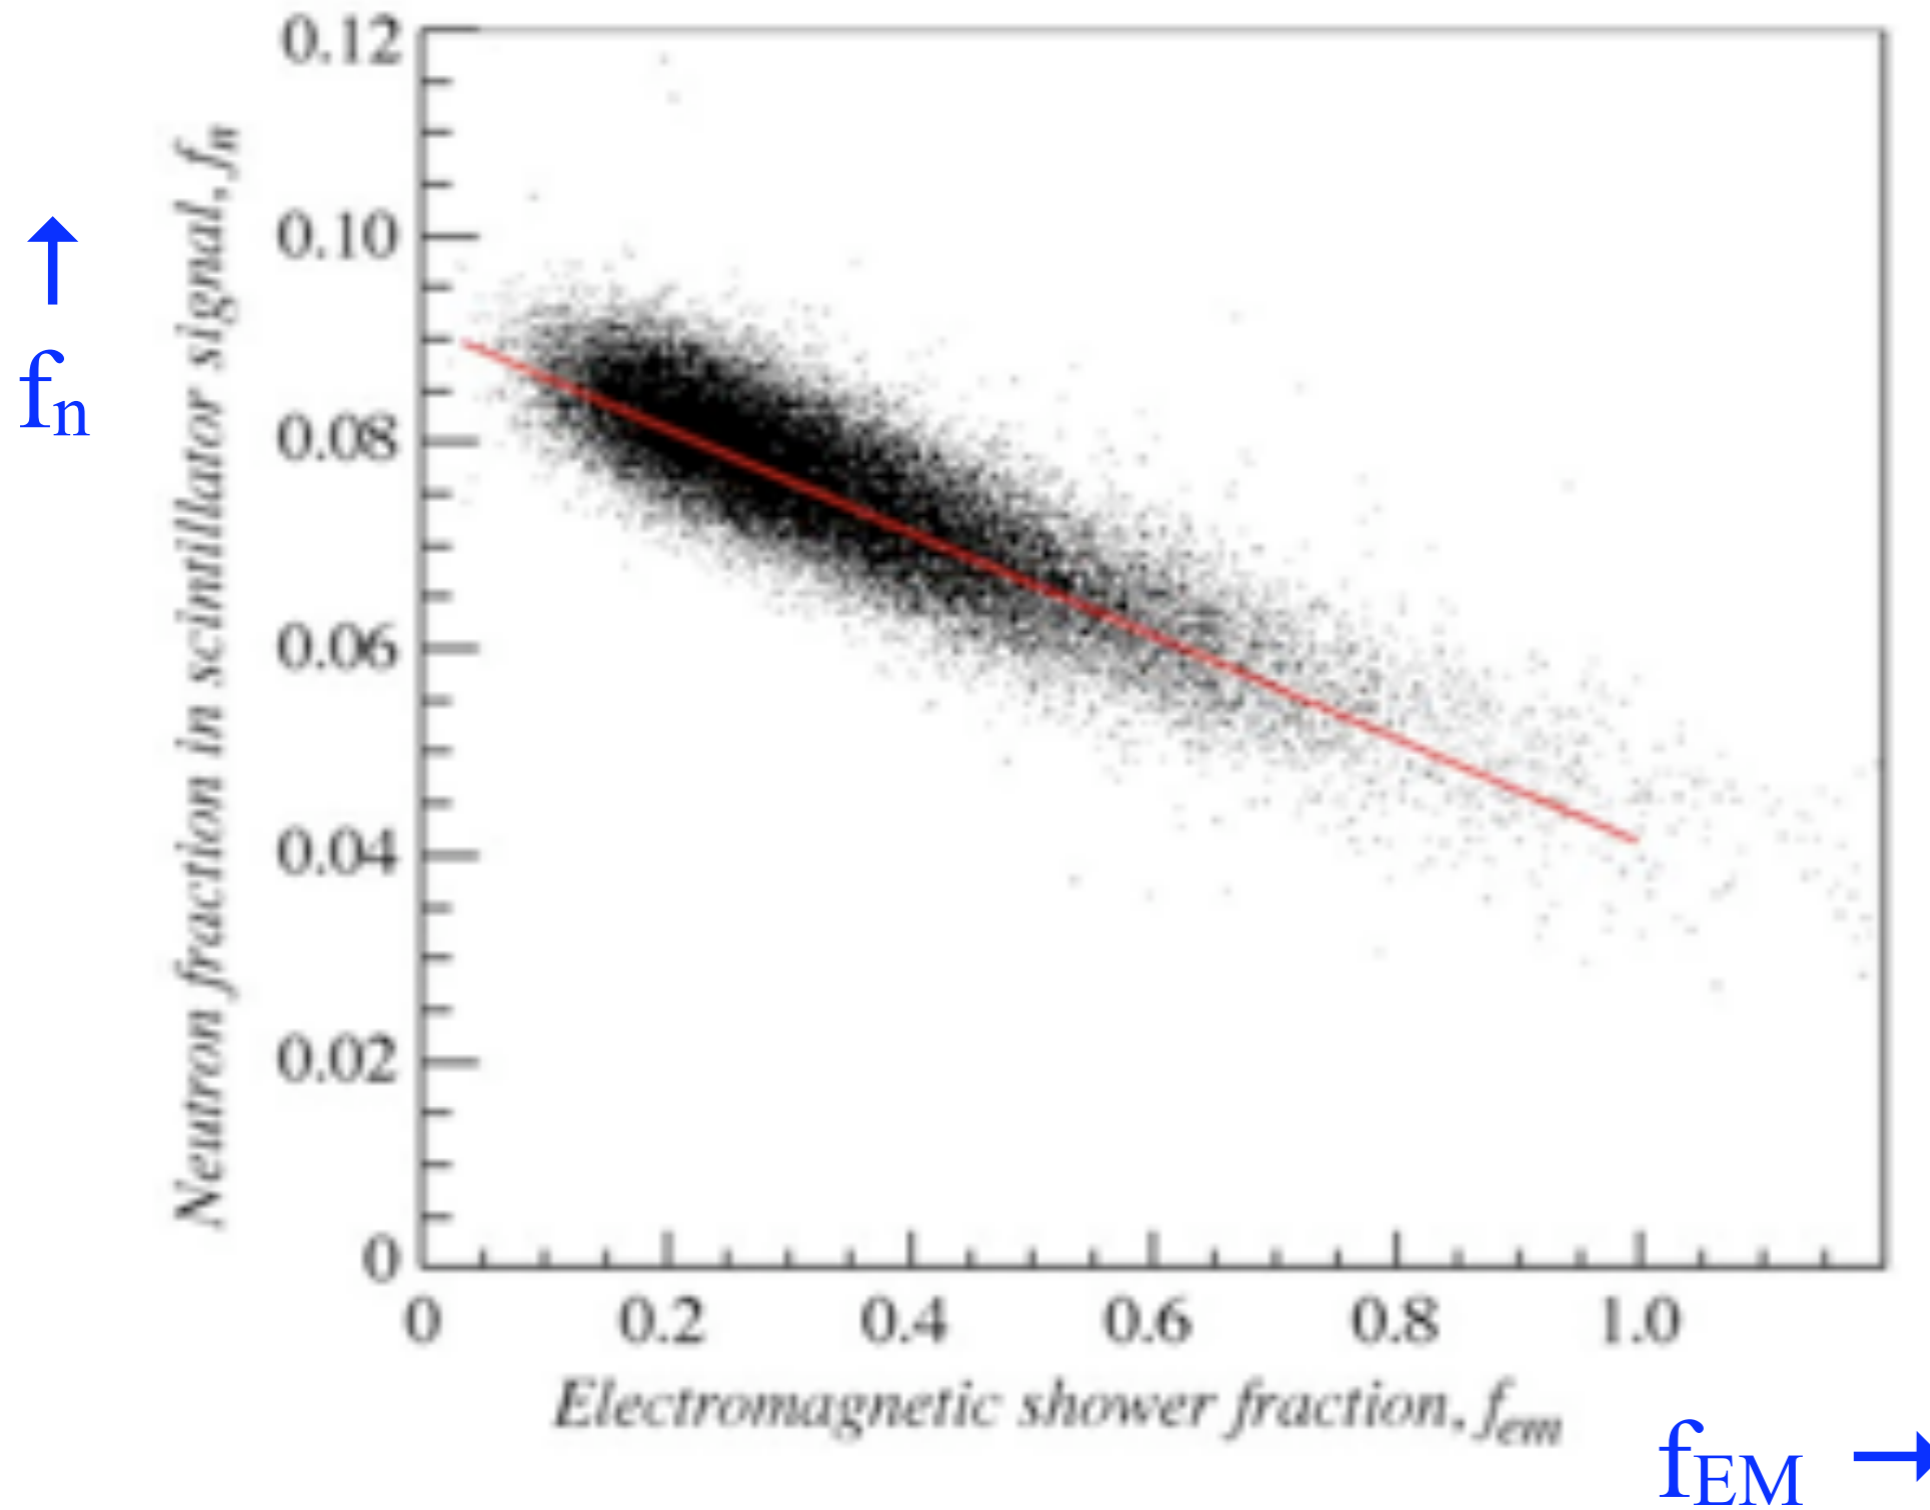

fluctuations in  
shower  
development  
between  
 $\pi^0 \rightarrow \gamma\gamma$  and  $\pi^+/\pi^-$



Broad, asymmetric  
Čerenkov response  
is a sum of narrow  
Gaussians

Čerenkov

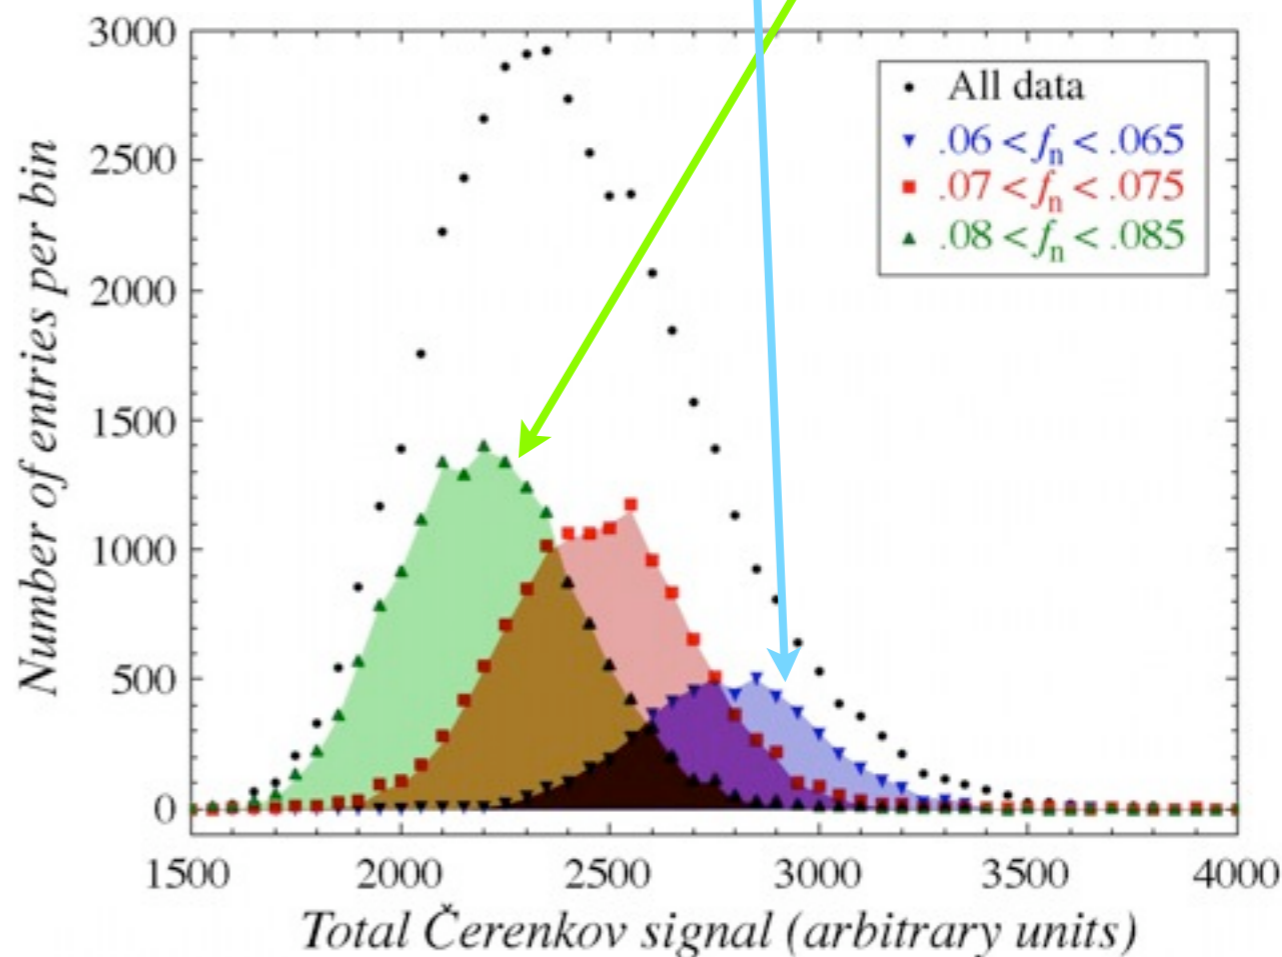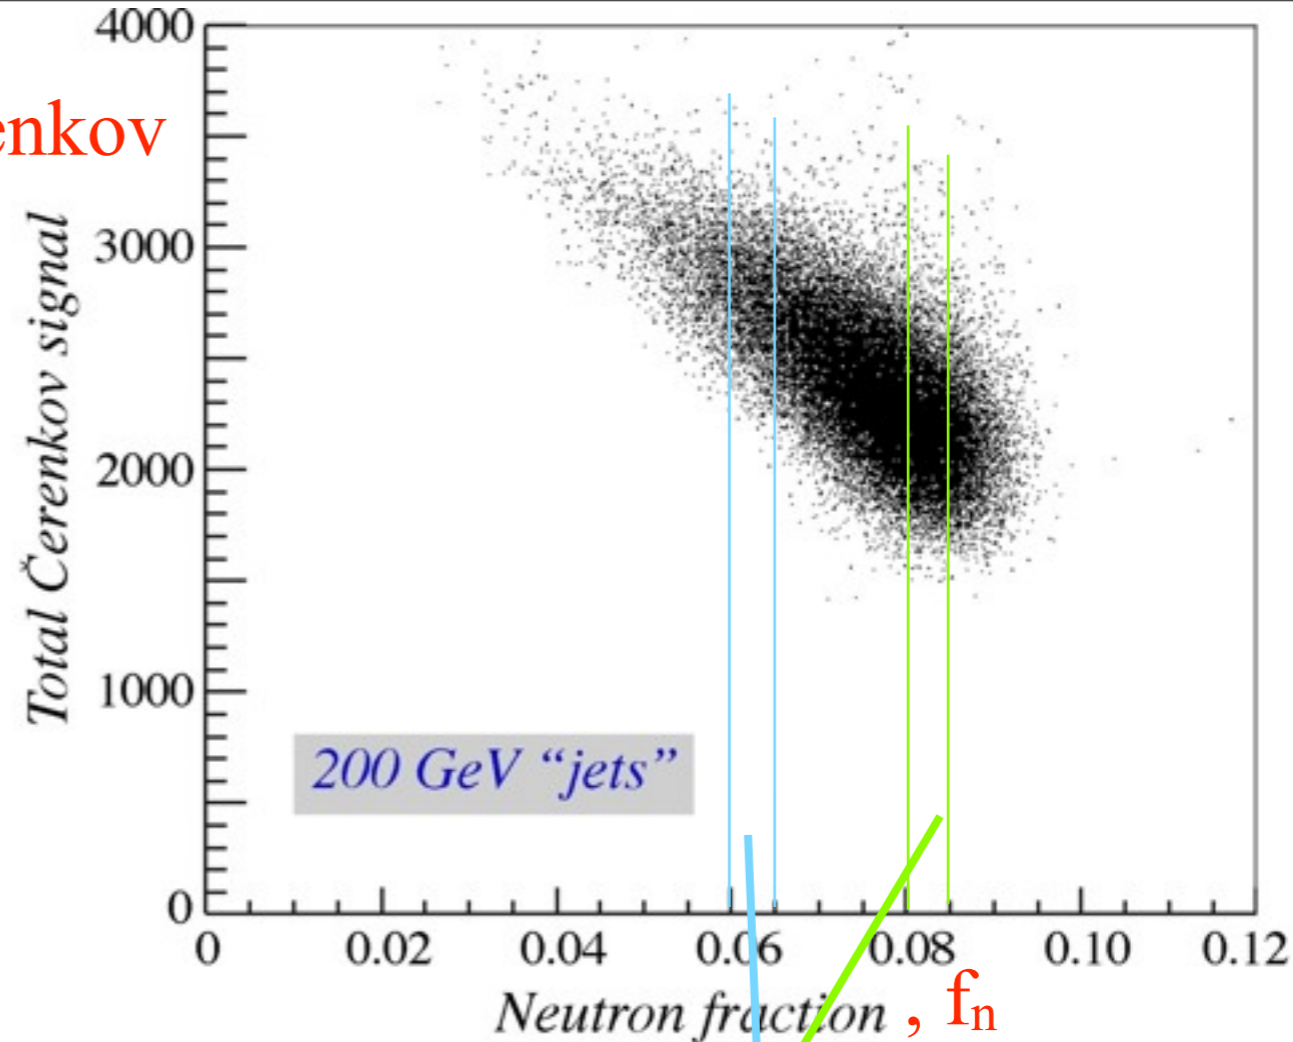





Linearly shift each Cerenkov distribution  
to  $f_n \sim 0.07$  (arbitrary, middle value)

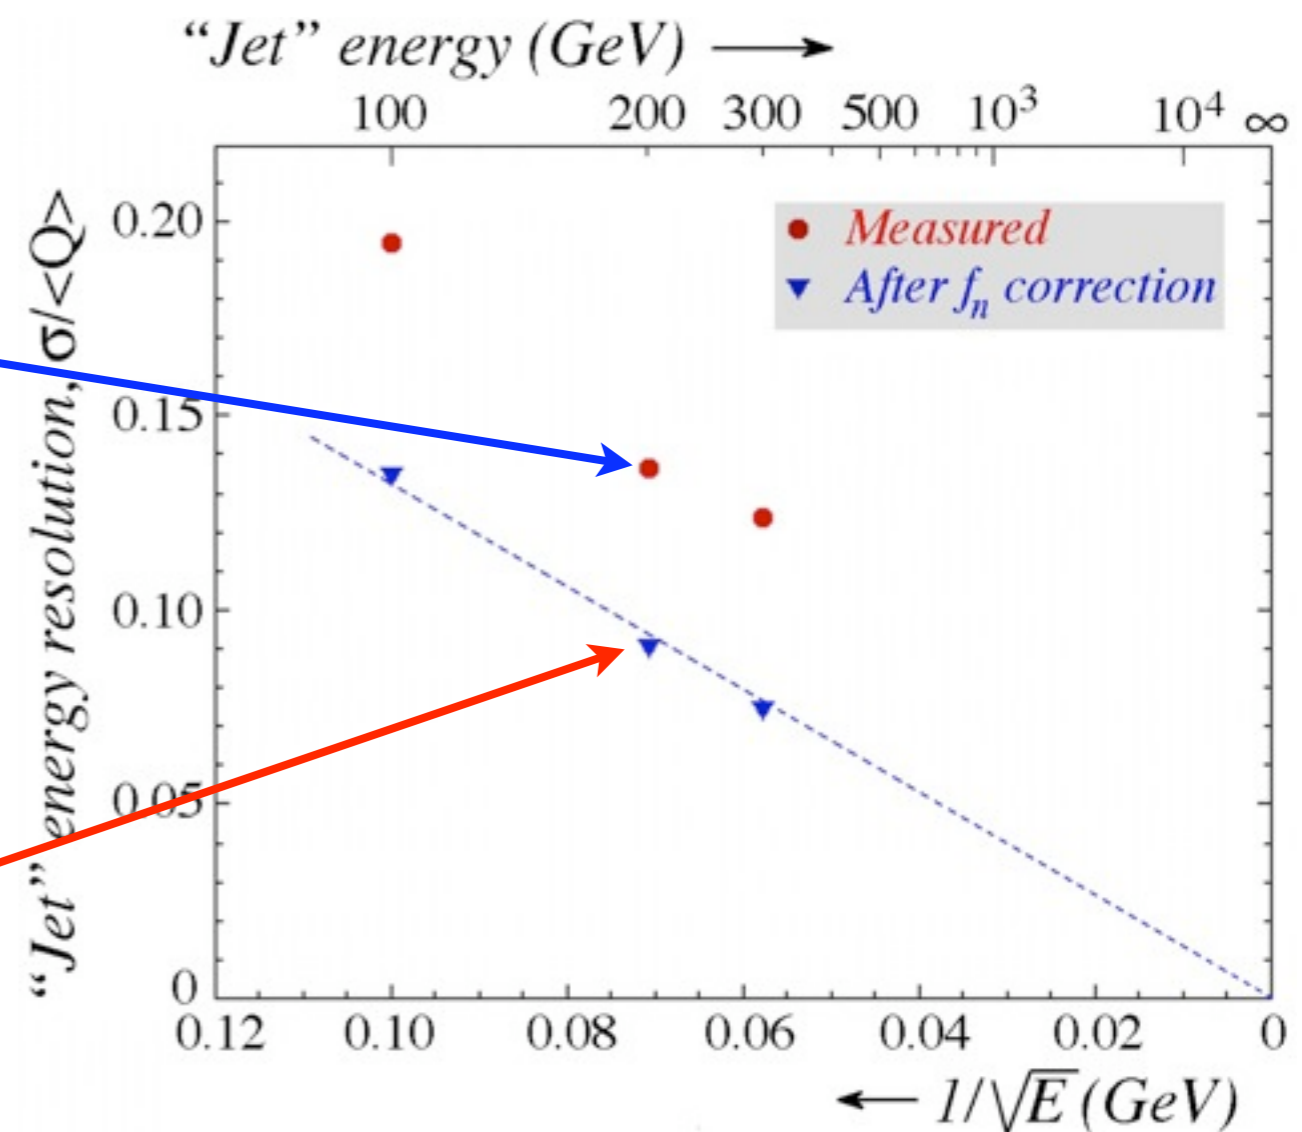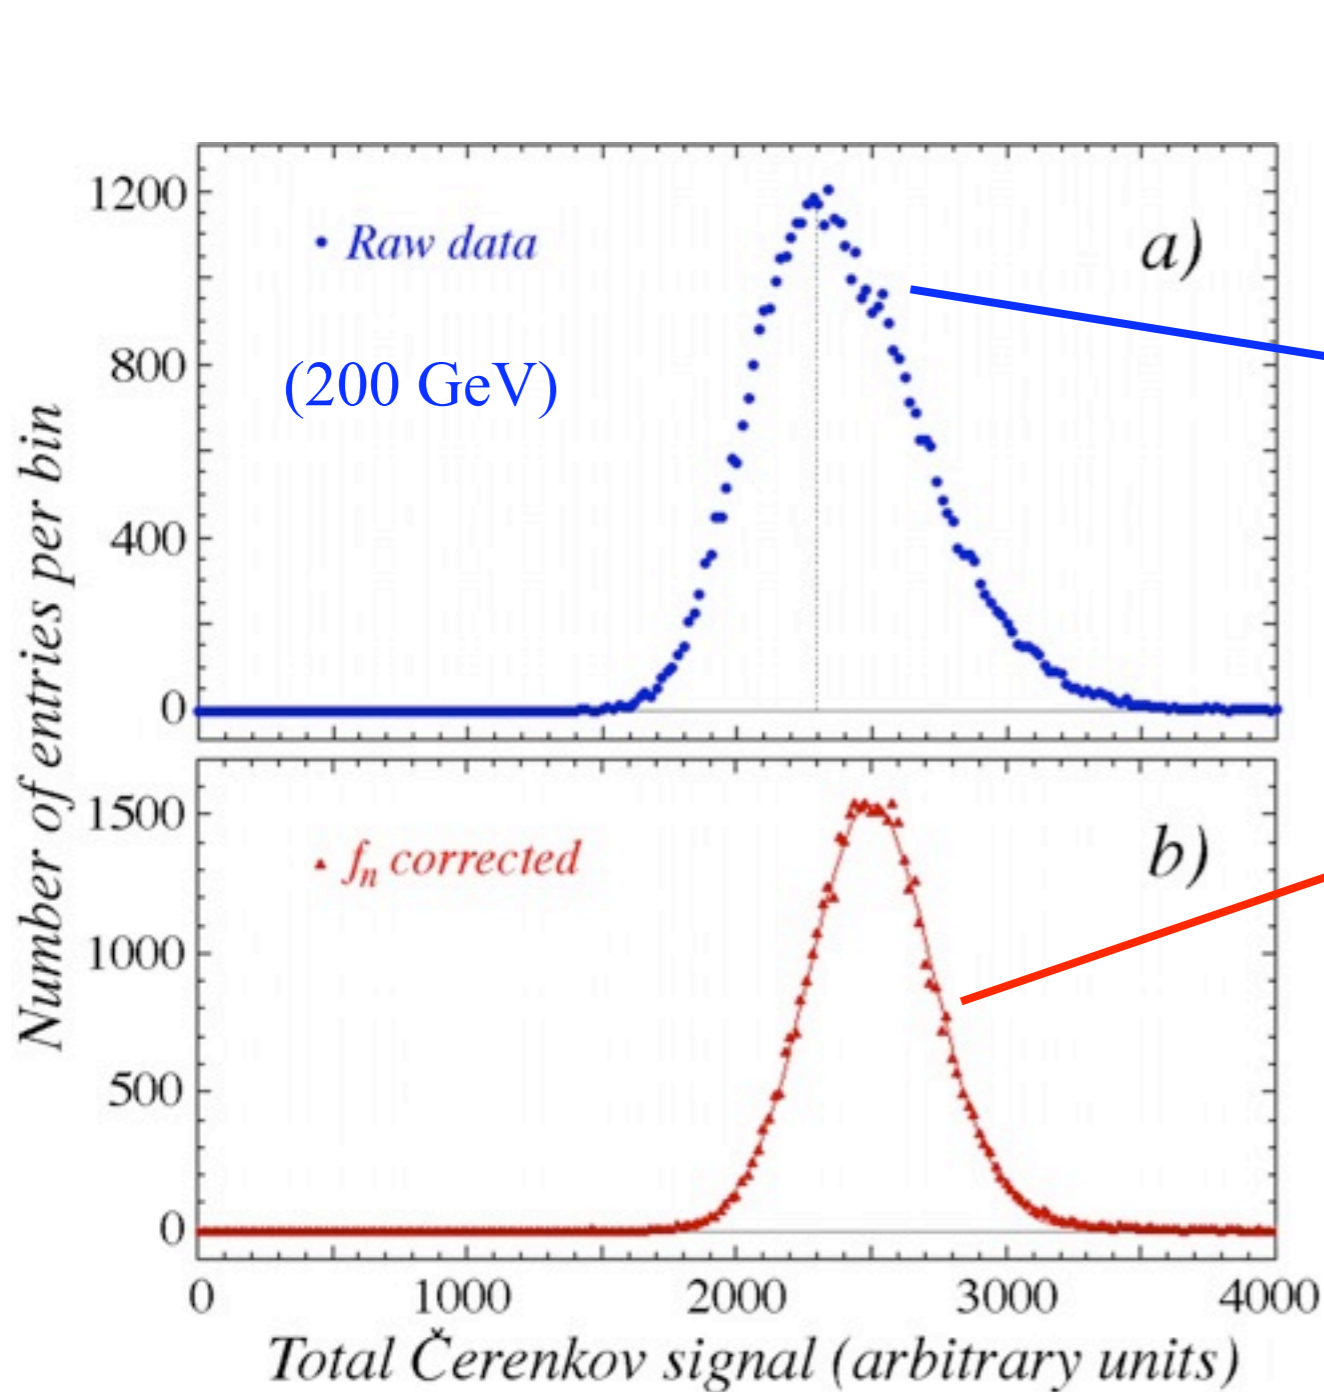

$f_n$ -corrected resolution improves, improves  
with energy, and leaves no evidence of a  
constant term ... *the importance of neutrons*

For fixed  $f_{EM}$ , the neutron fraction varies by  $\sim 15\%$  or more; *these are the binding energy loss fluctuations on top of the EM fraction fluctuations.*

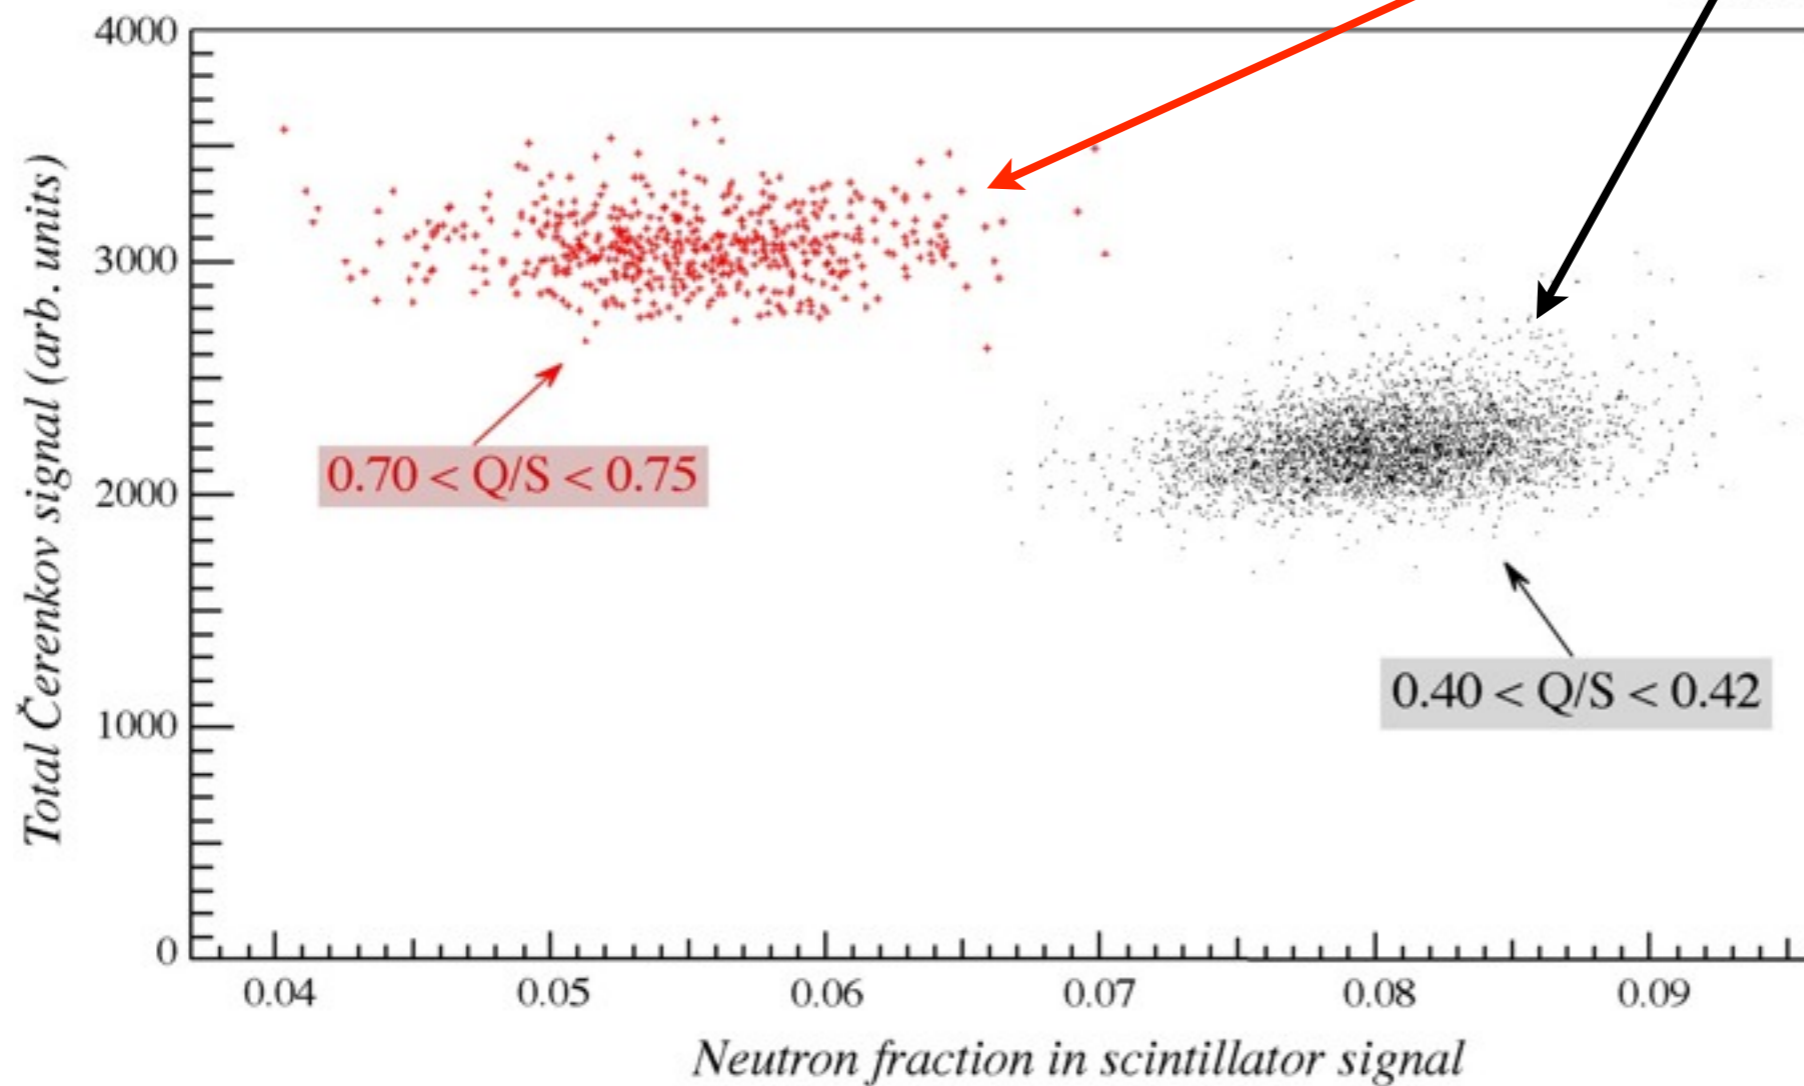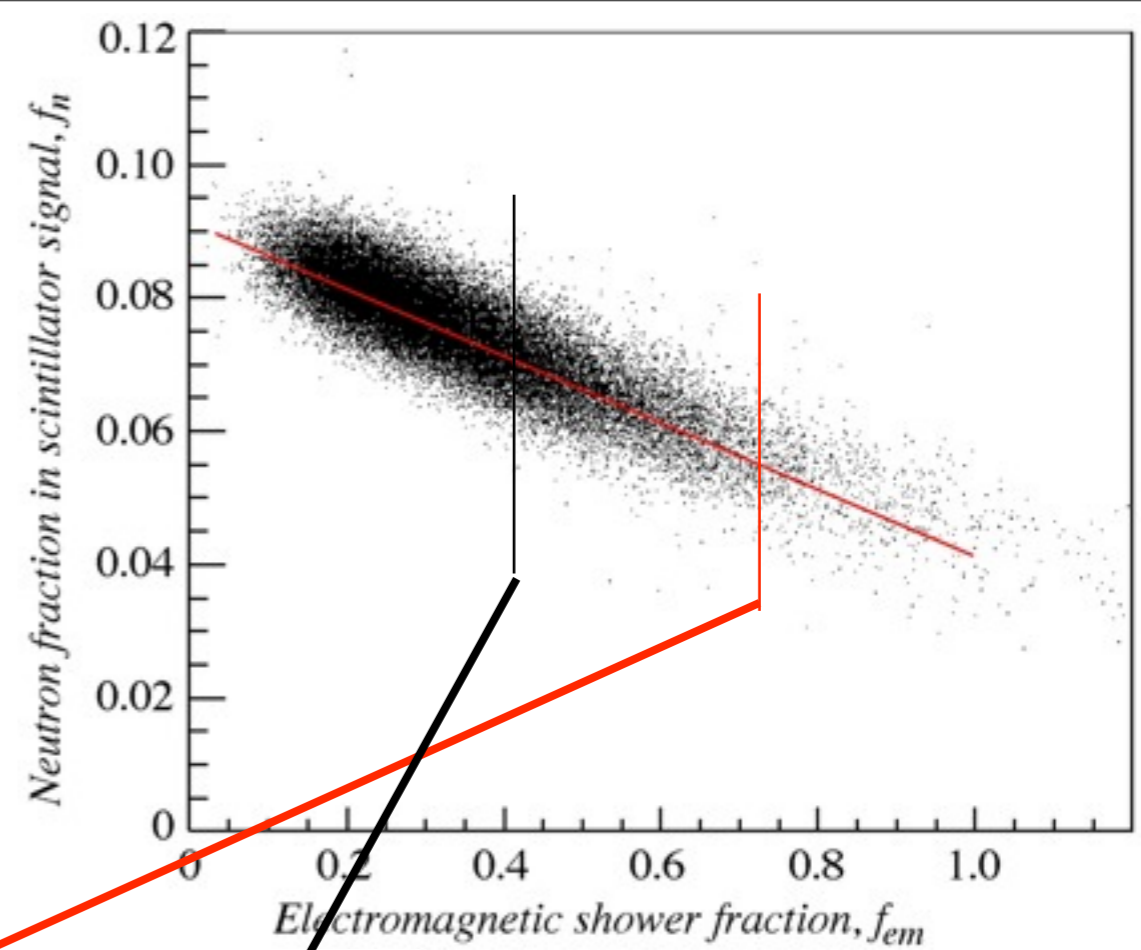



ZEUS(H) vs D0(LAr)

For fixed  $f_{EM}$ , the resolution in the Čerenkov signal worsens as the neutron fraction grows larger, and its fluctuations grow larger.

For  $f_{EM} \sim 0.55$  and  $f_n$  slices

$0.045 < f_n < 0.065$ ,  $\sigma/mean \sim 4.7\%$

$0.050 < f_n < 0.055$ ,  $\sigma/mean \sim 4.4\%$

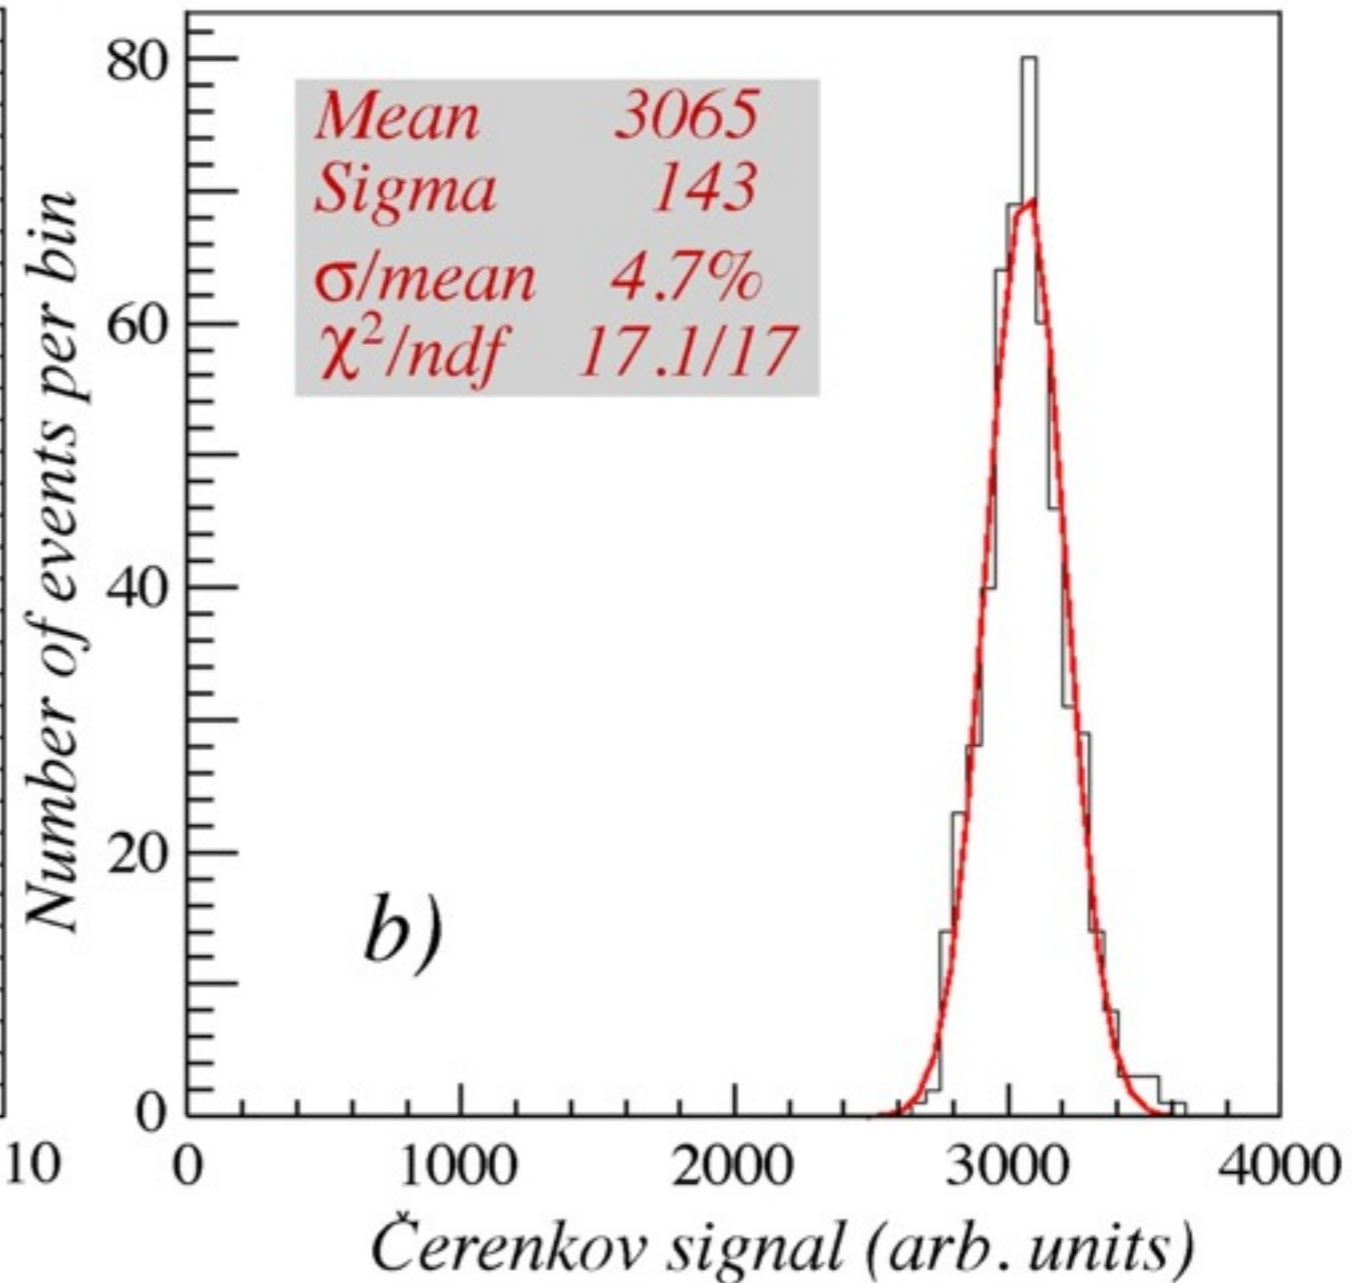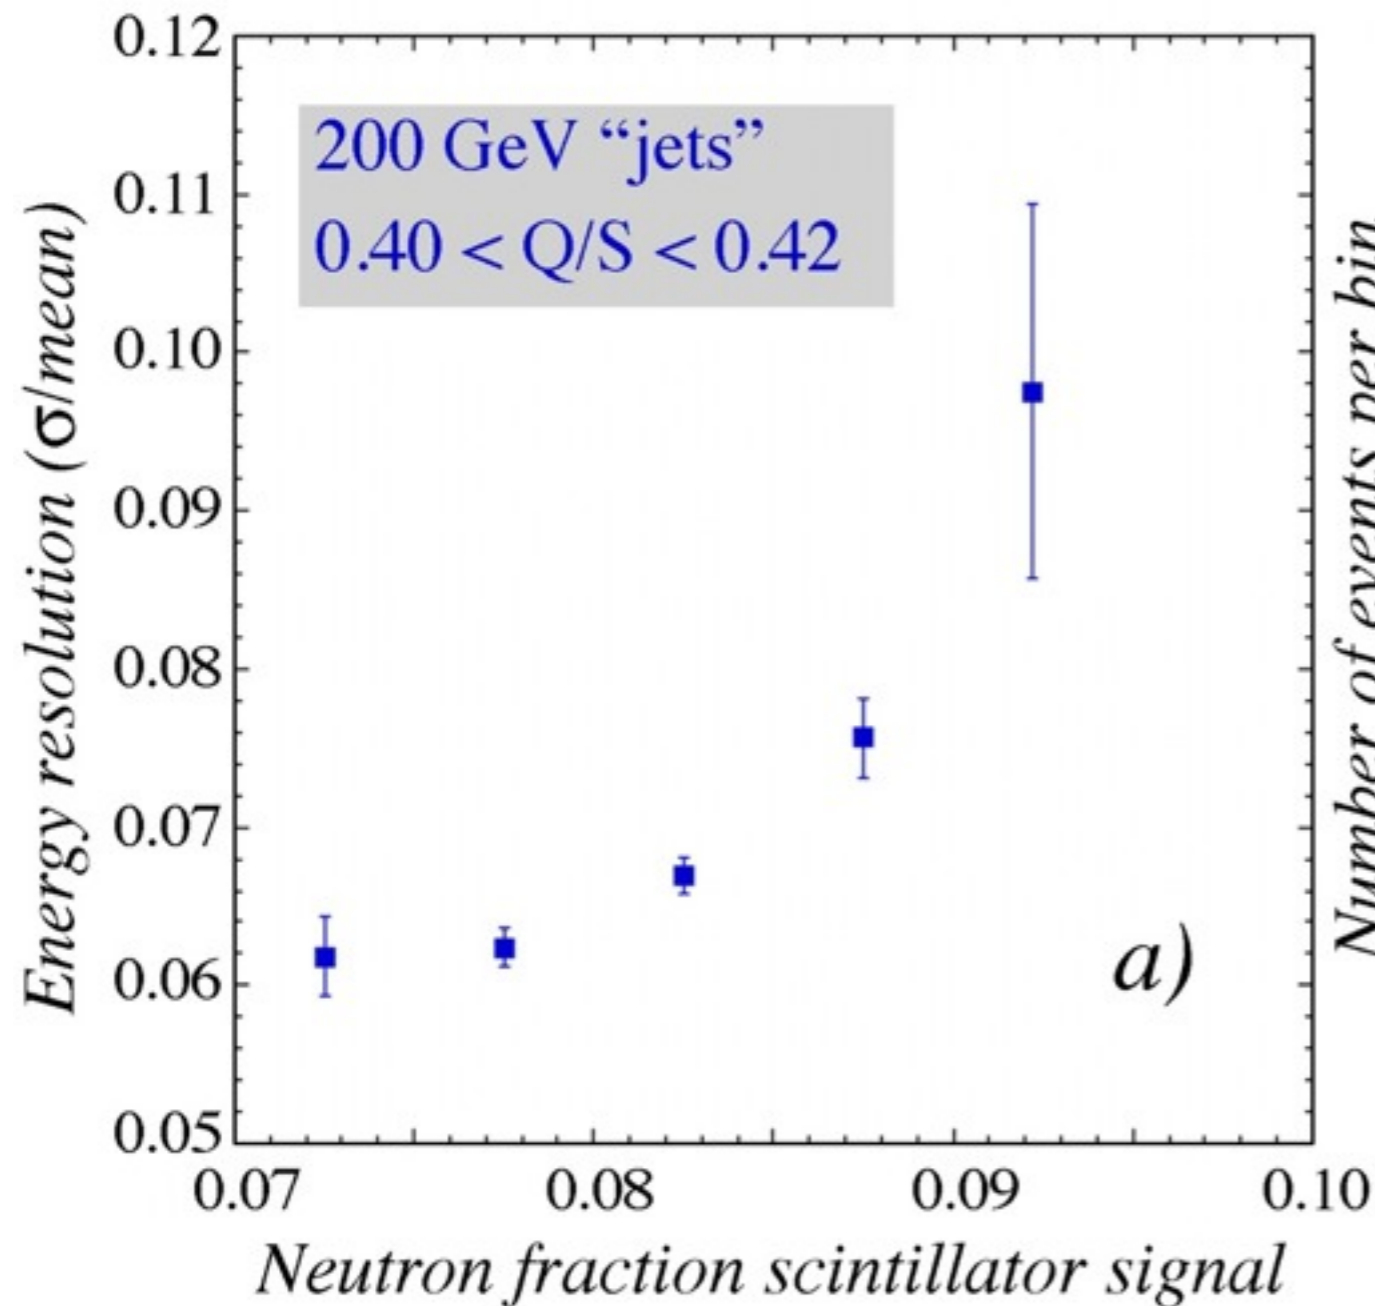






*We are pushing the limits of DREAM: leakage fluctuations are  $\sim 4\%$ .*



## Summary and plans for neutrons in DREAM

- Larger DREAM module - keep leakage below 1%
- Time-readout of all channels (DRS4)
- temporal and spatial image of hadronic shower development
- Search ultimate limits on hadronic energy resolution:  
~13%/√E (Pb)    ~15%/√E (Cu)    ~20%/√E (U)  
fundamentally limited by the correlation of neutron kinetic energies with binding energy losses.


# SPARE PLOTS

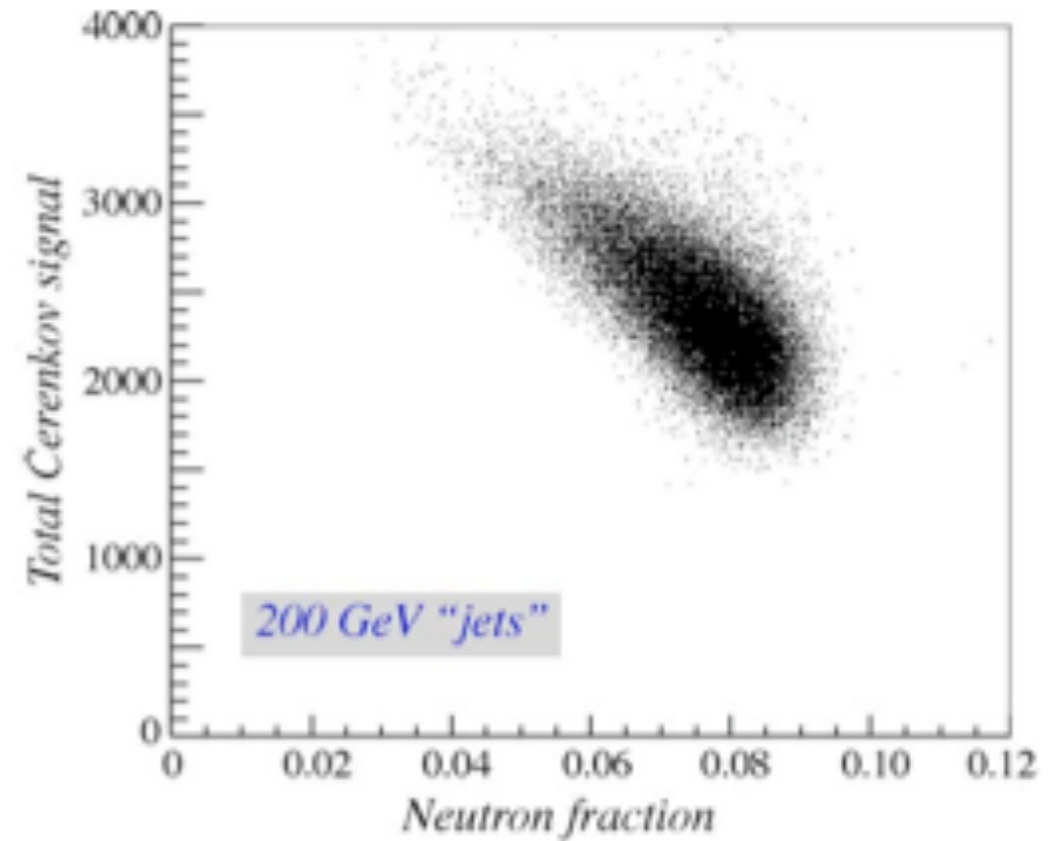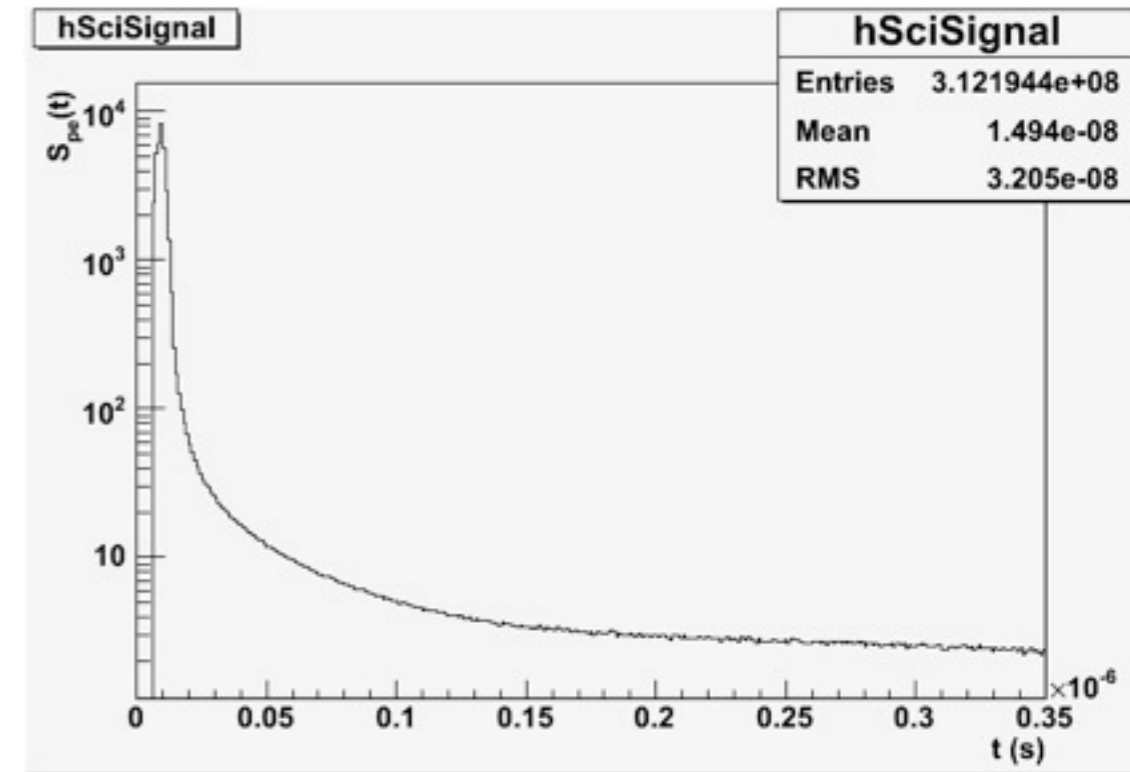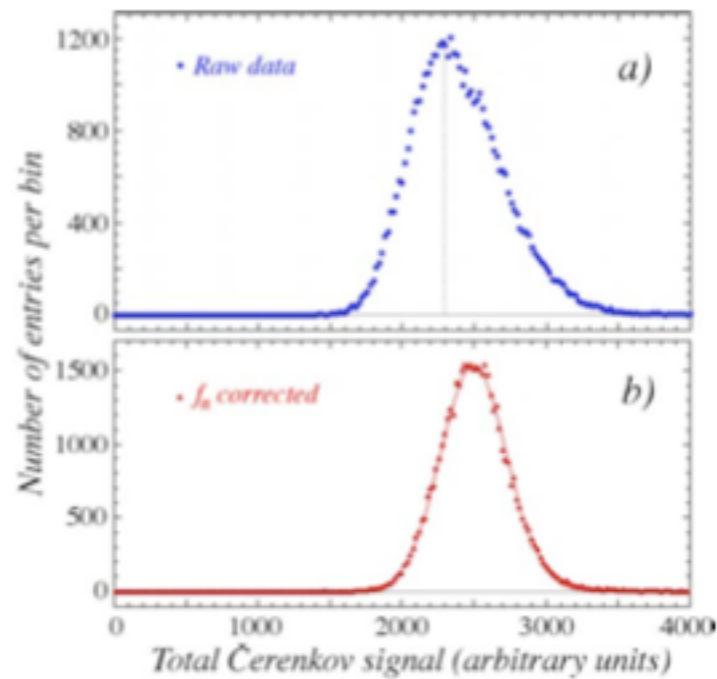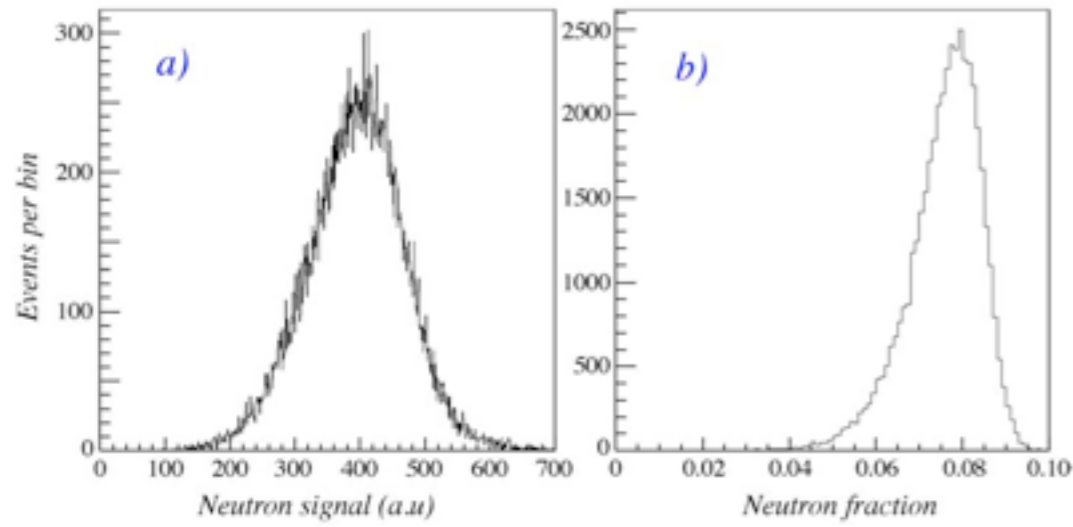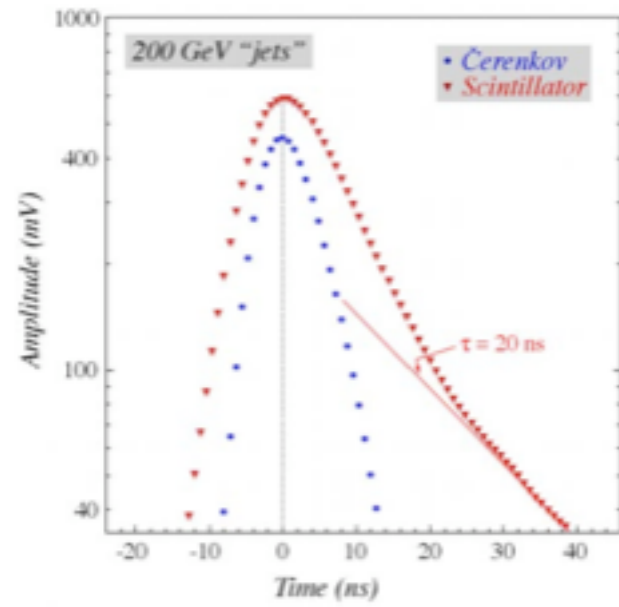

# DREAM data

## $\pi^+$ 200 GeV

Run 1724 200 GeV pi+

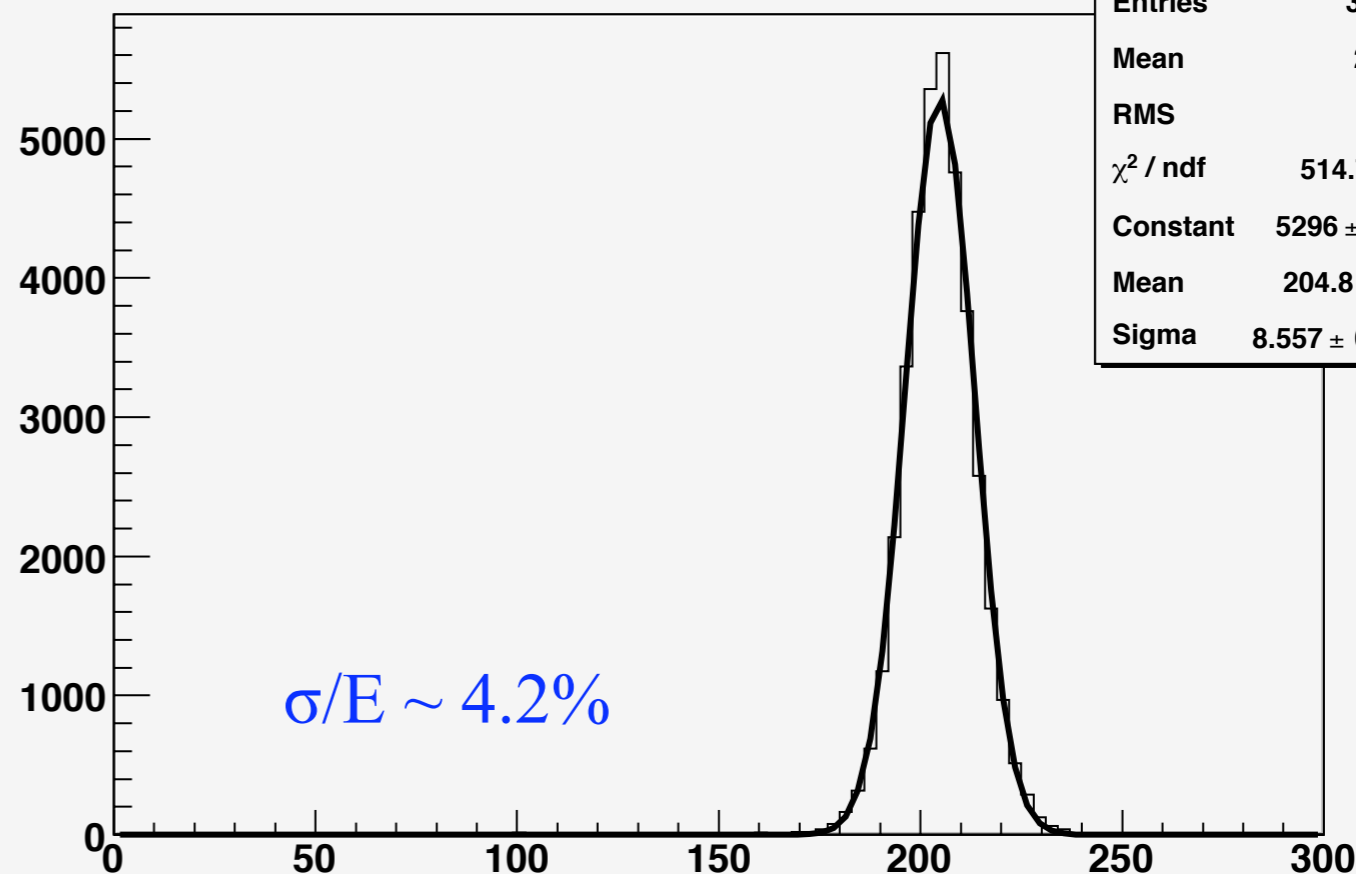


# Fluka simulation

## $\pi^+$ 200 GeV


(4 $\pi$  detector)

$\pi^+$  at 200 GeV

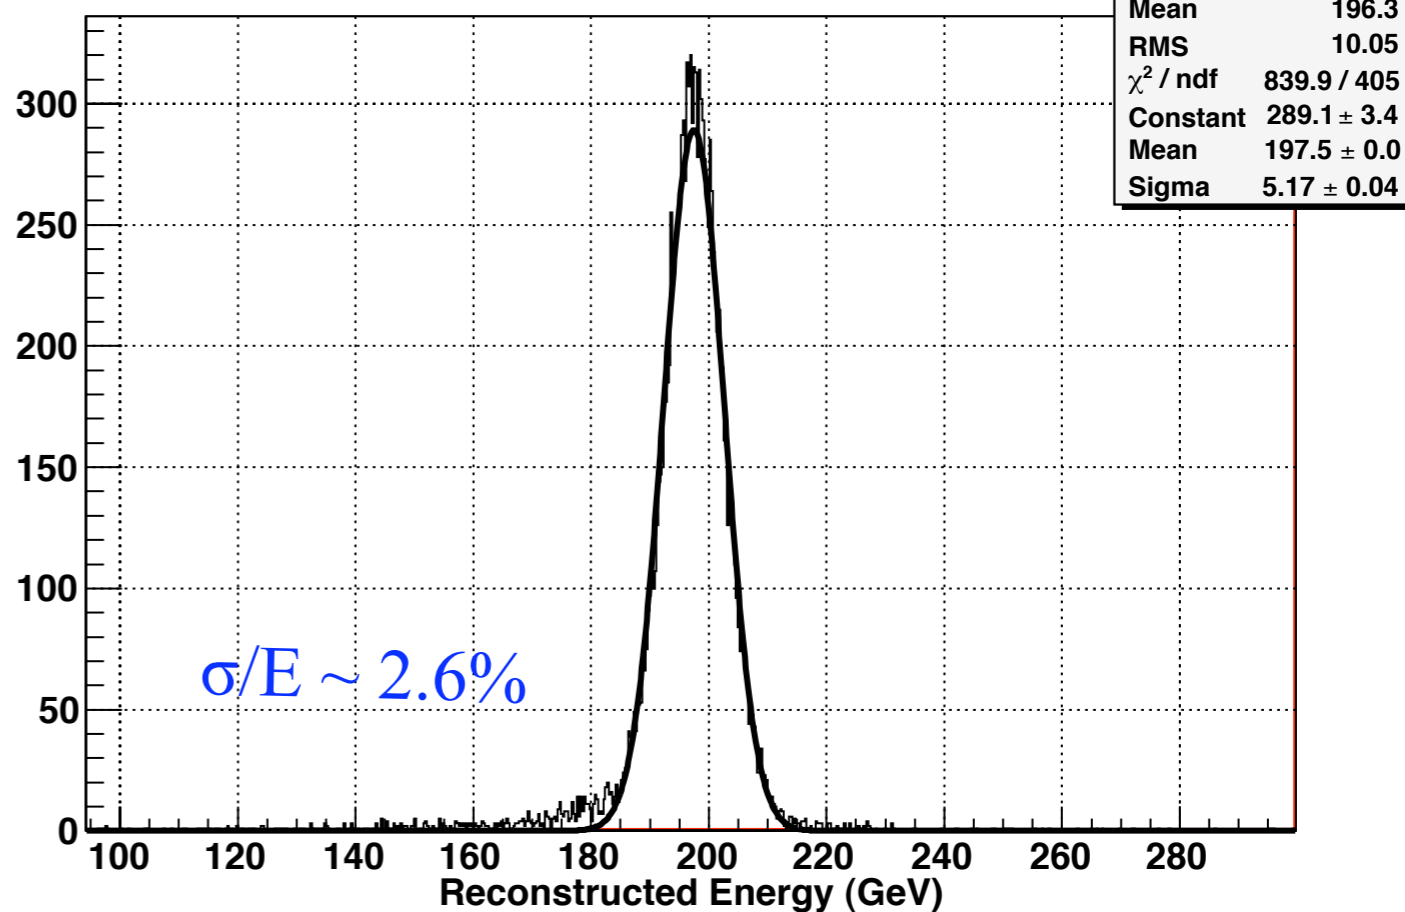



# Broad, asymmetric Čerenkov response is a sum of narrow Gaussians


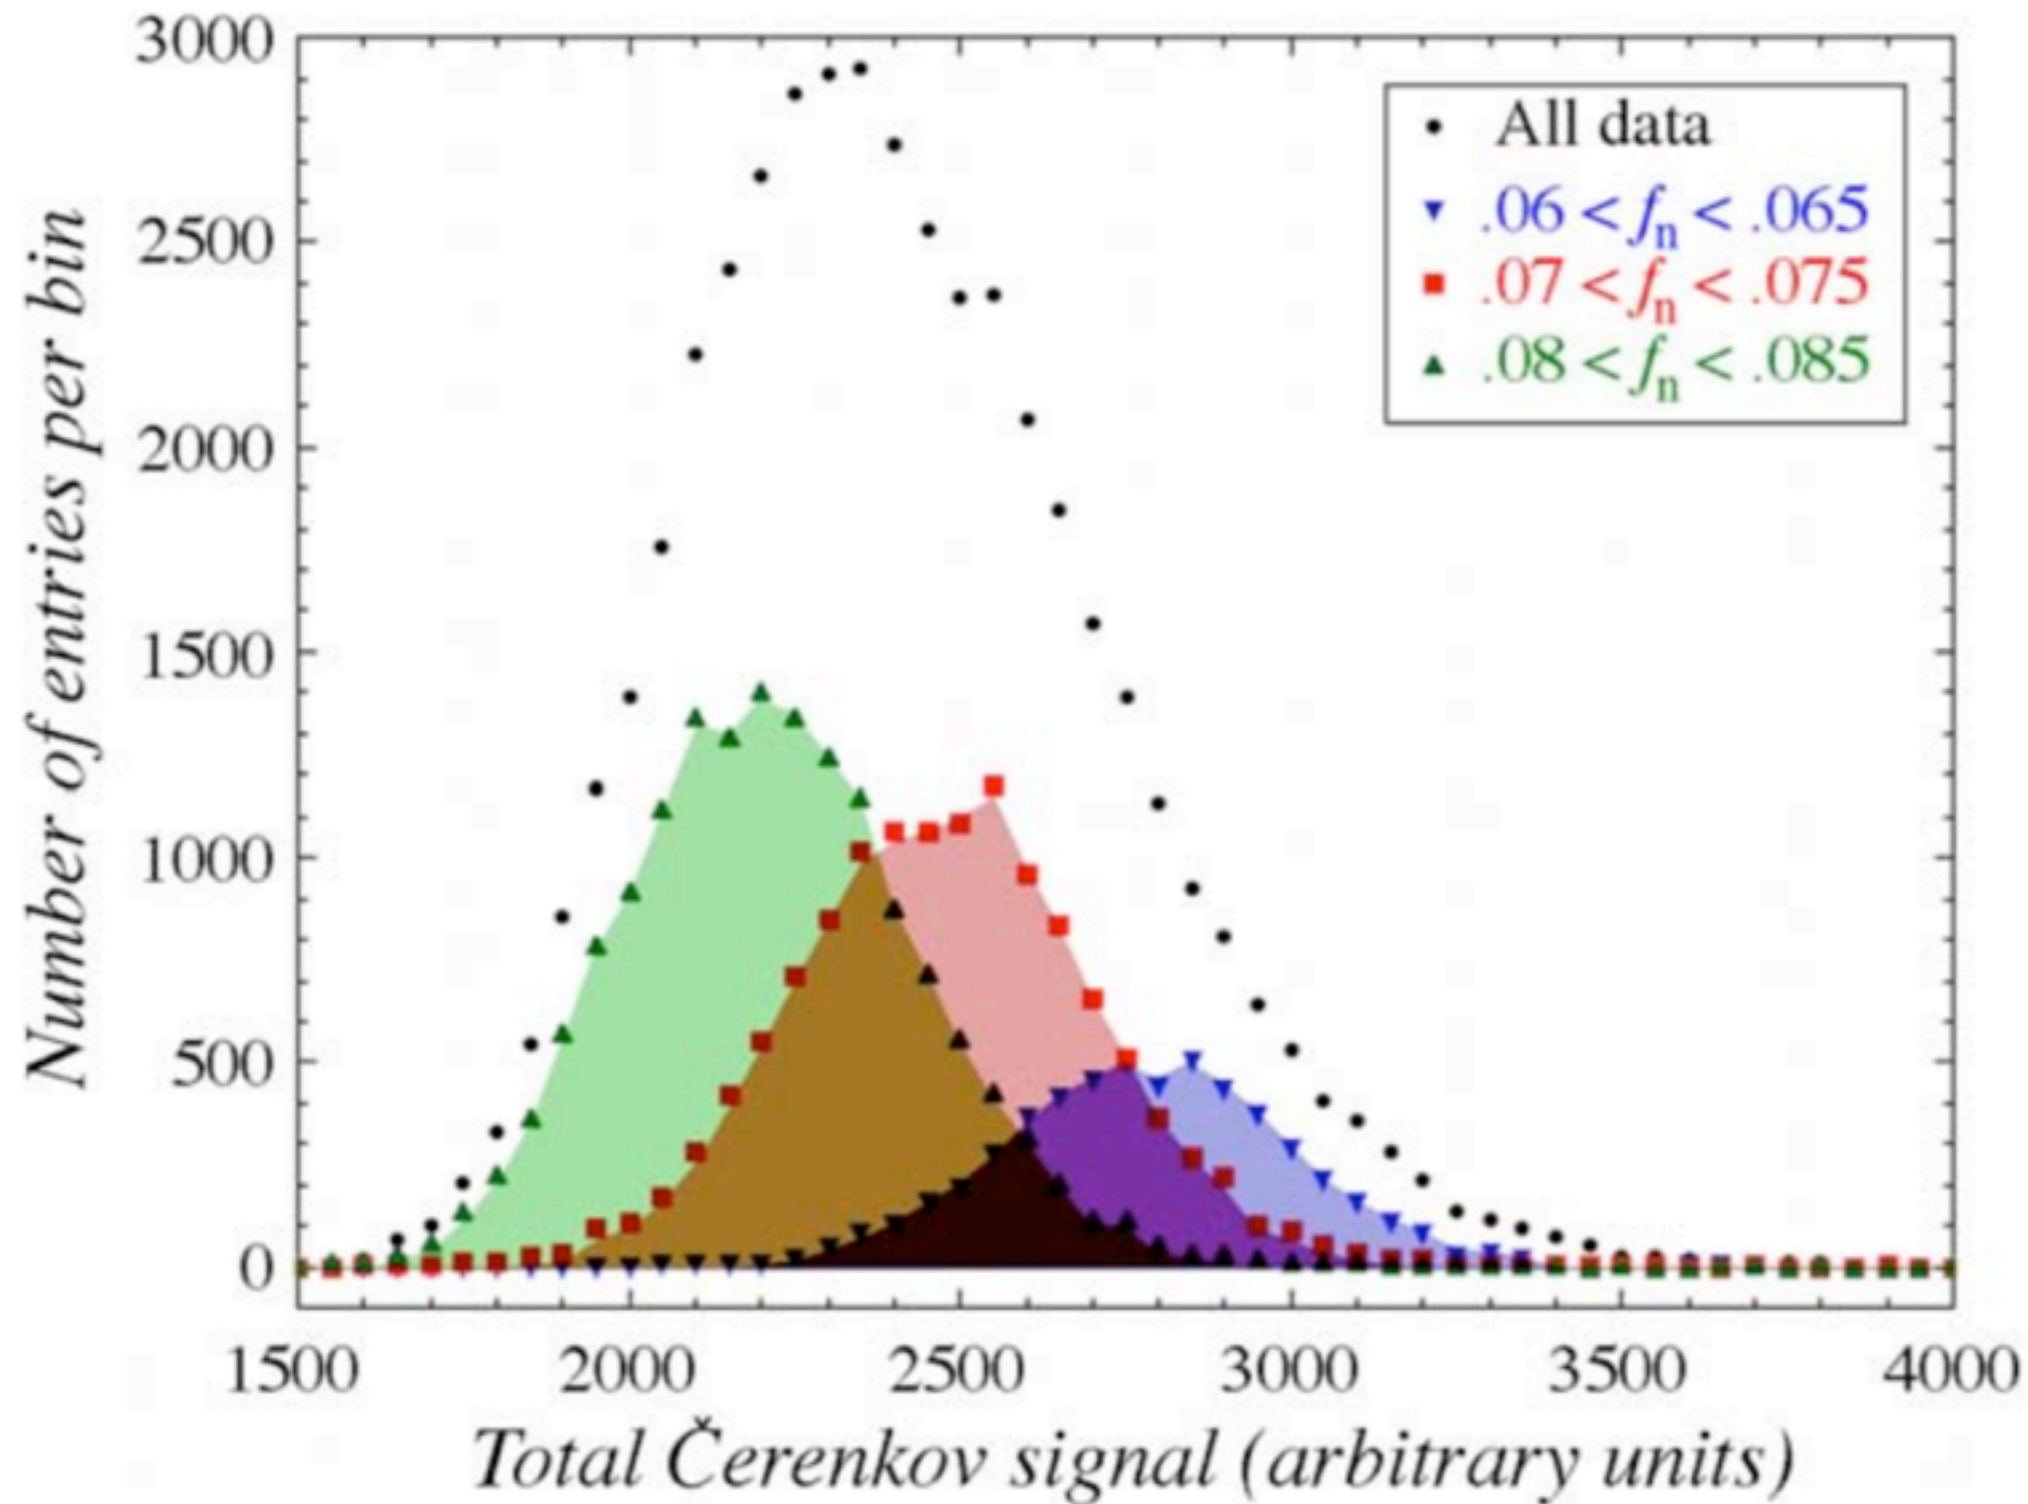





The neutron fraction is anti-correlated with the Cerenkov signal - as expected

More interestingly, the total Cerenkov distribution can be decomposed into its constituent parts as a function of  $f_n$ .





This is the analog to the same plot decomposed into fEM parts.



Cerenkov

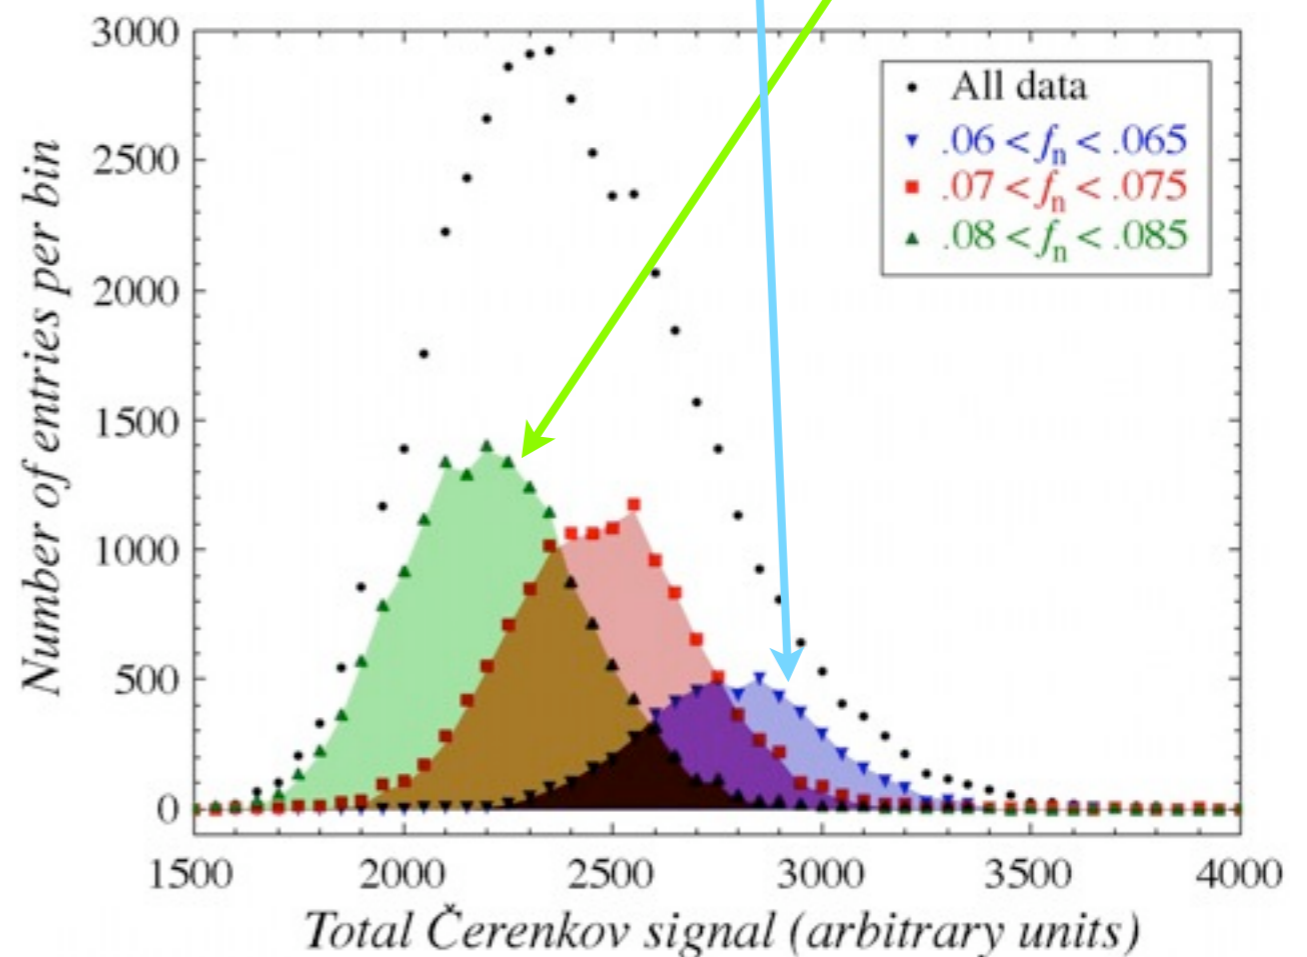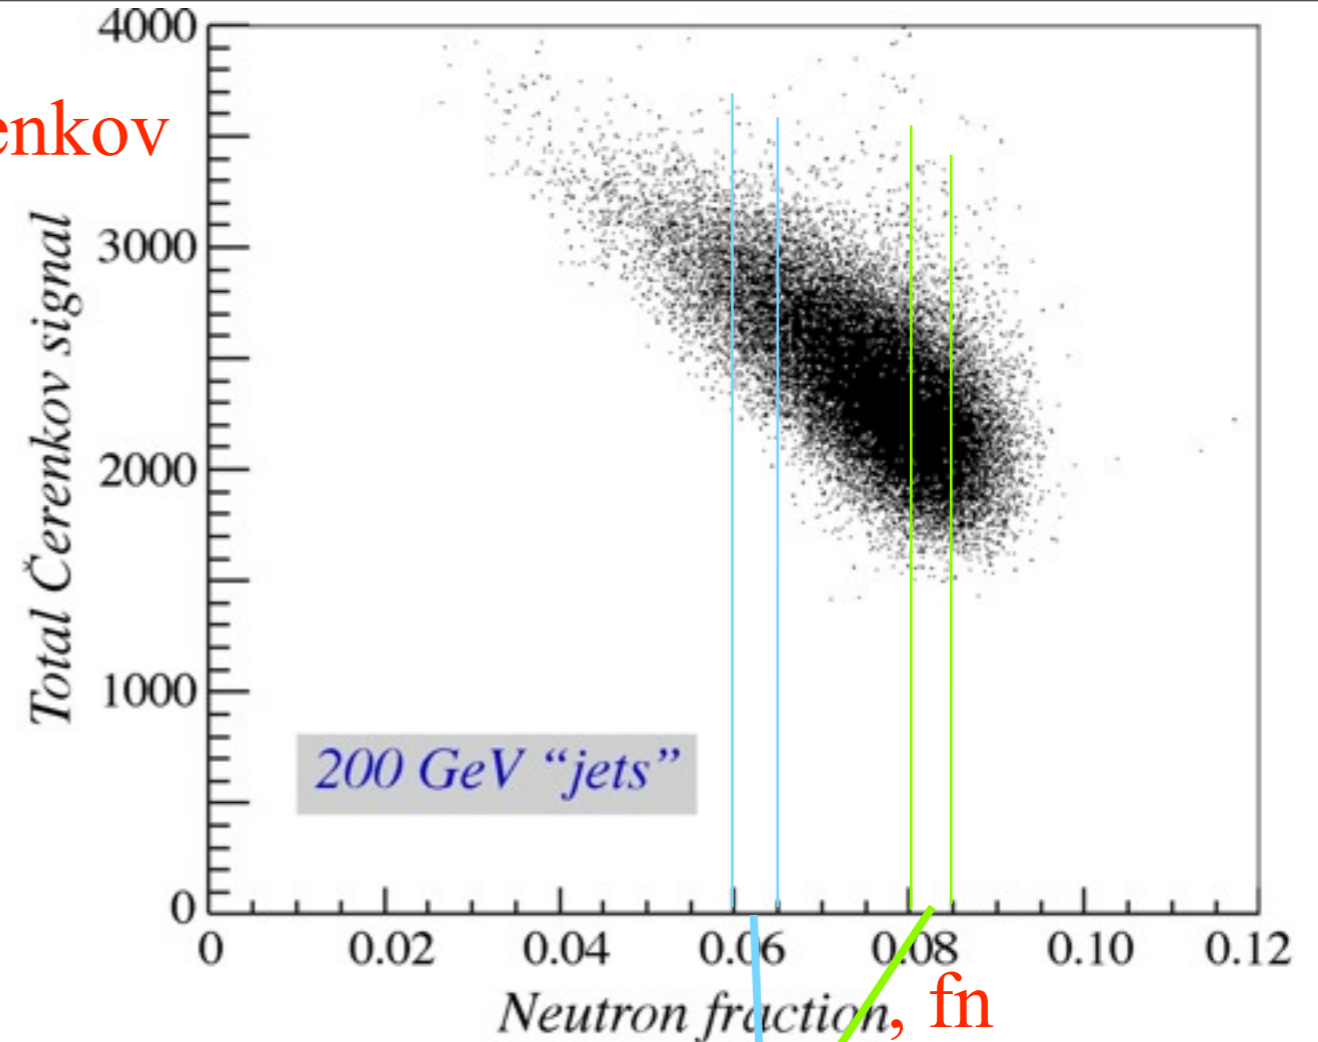

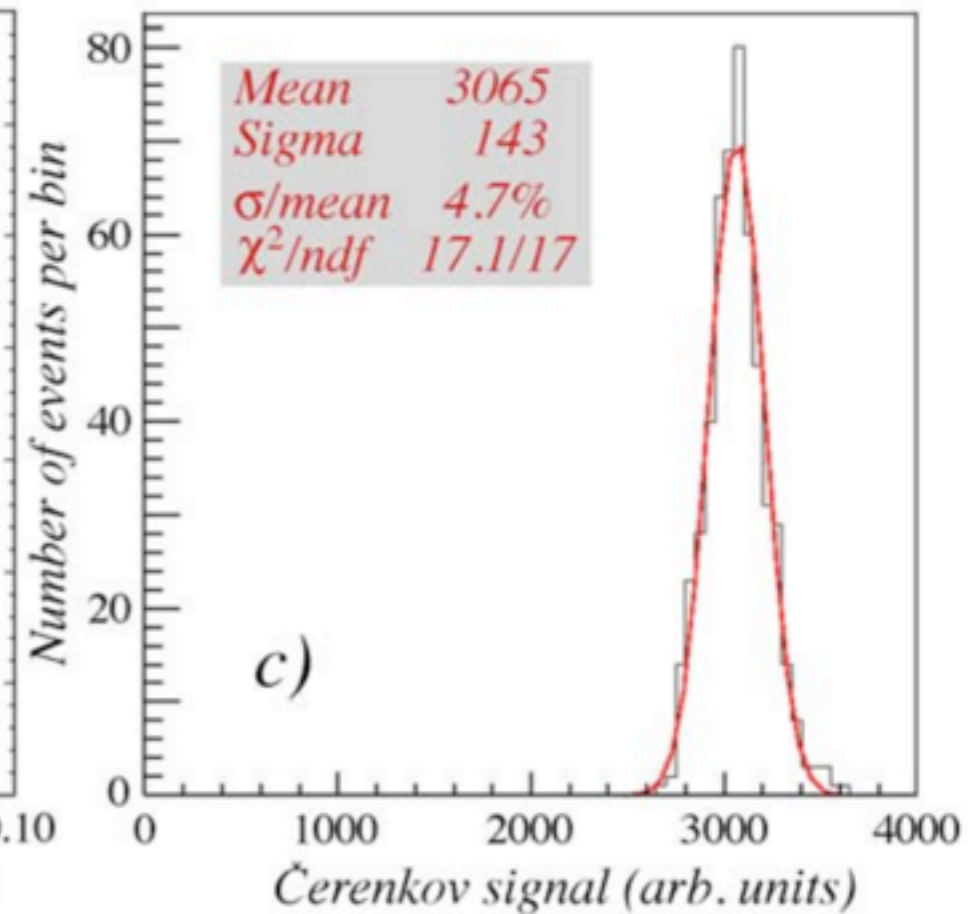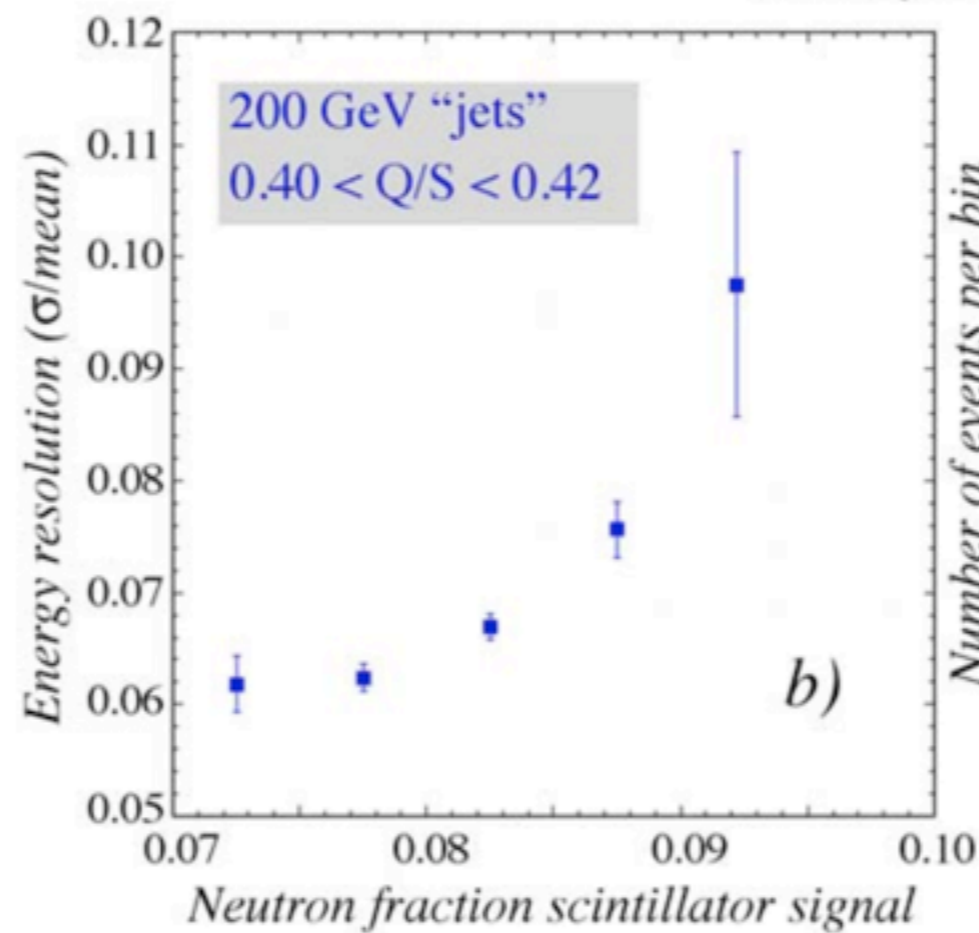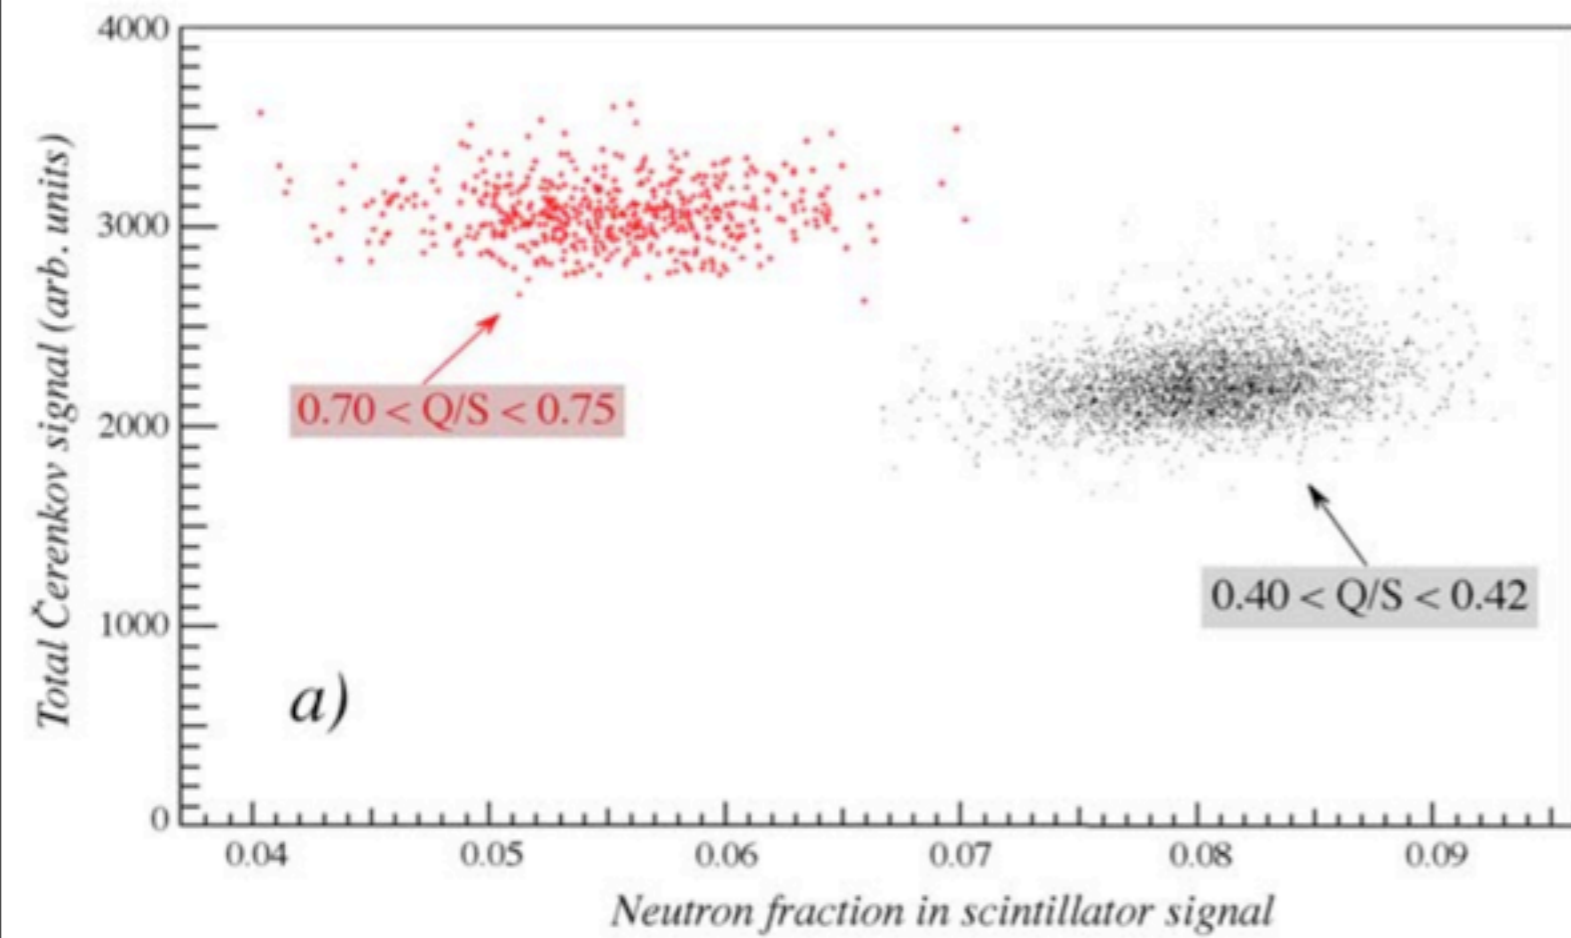



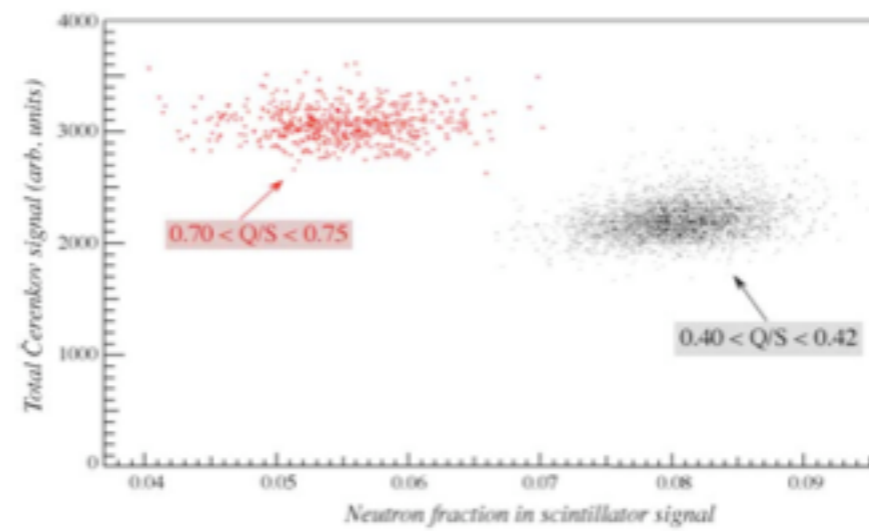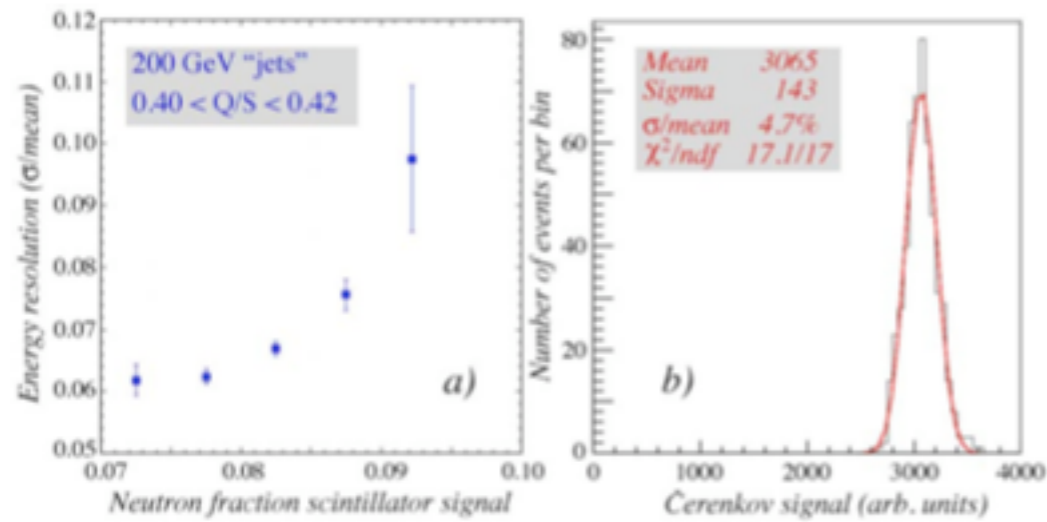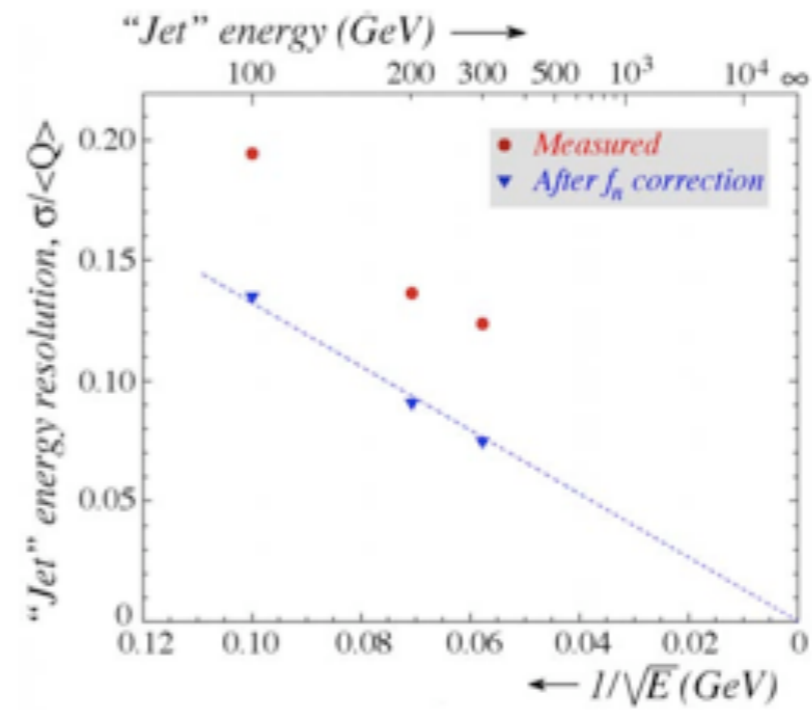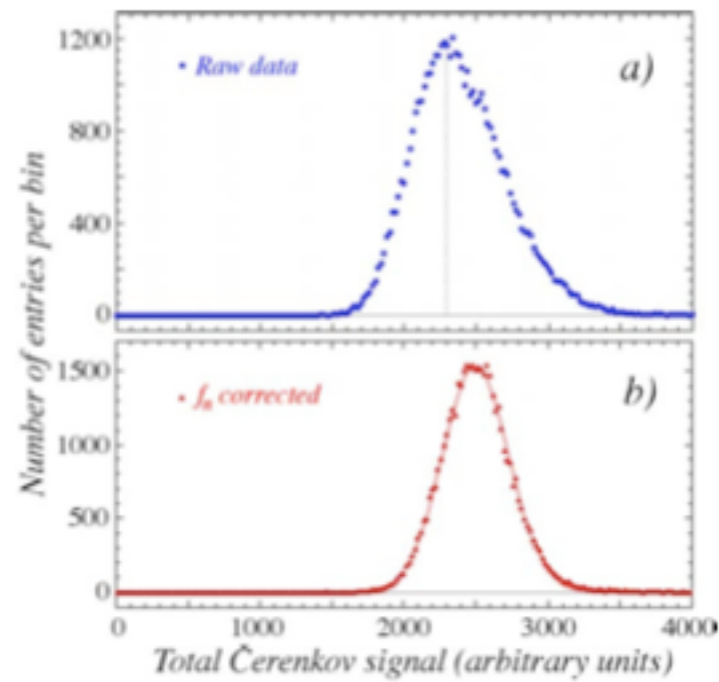

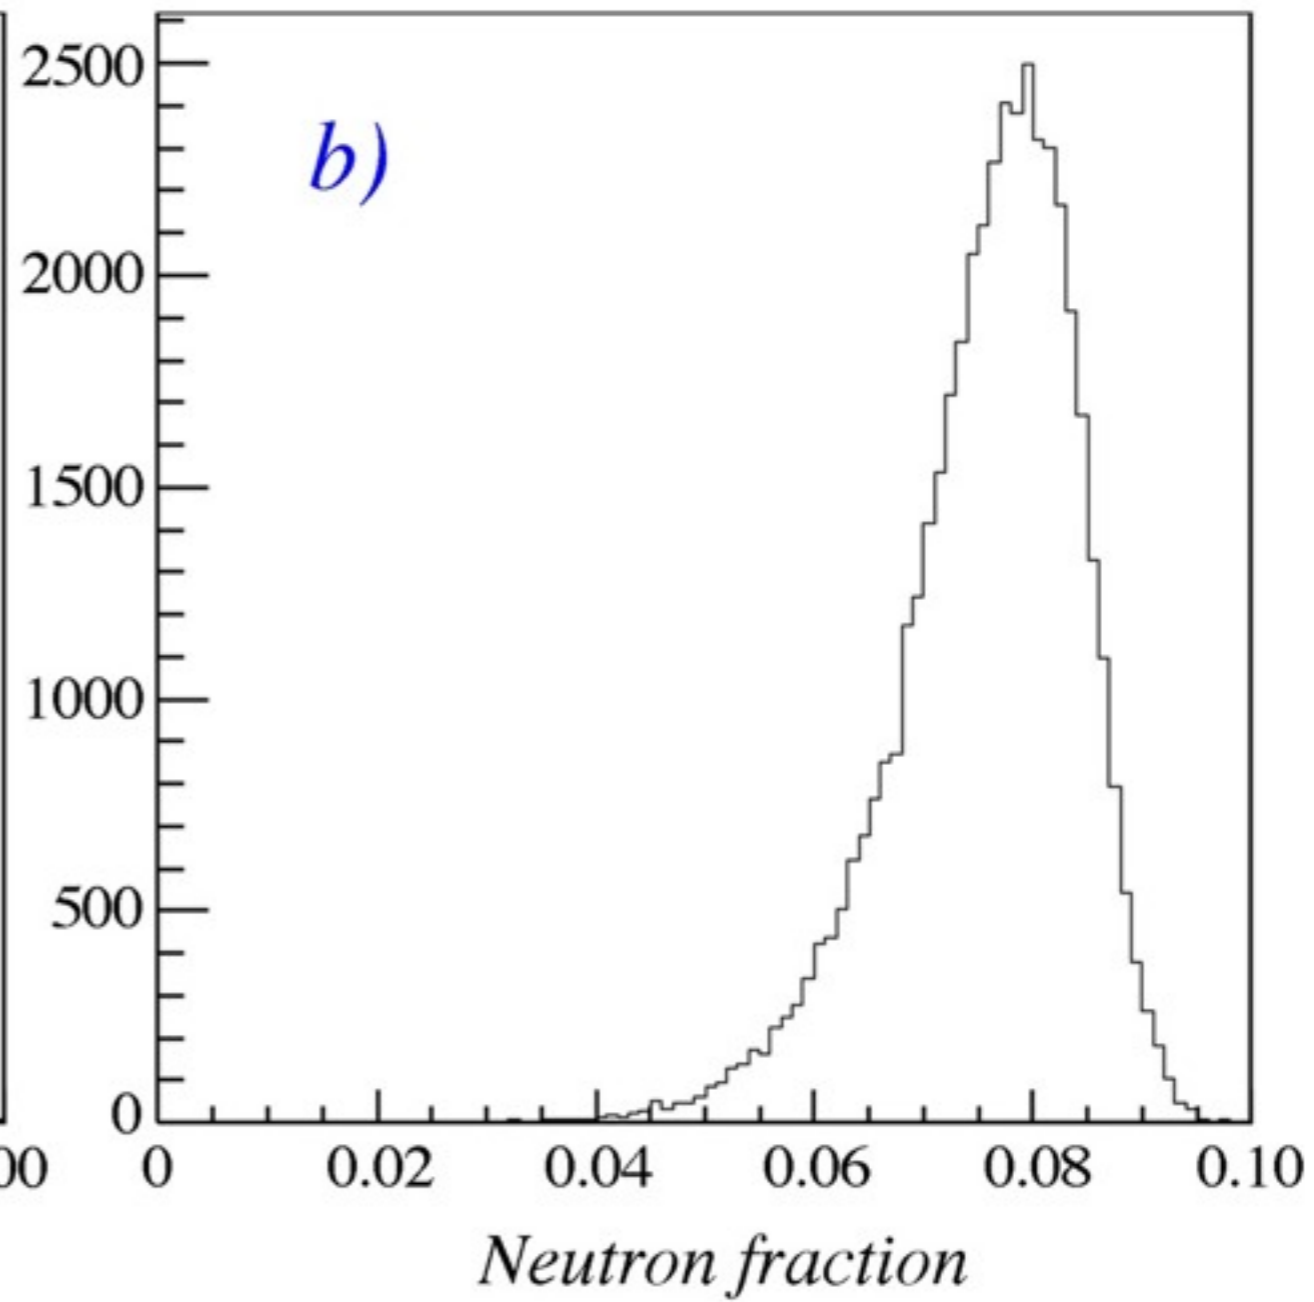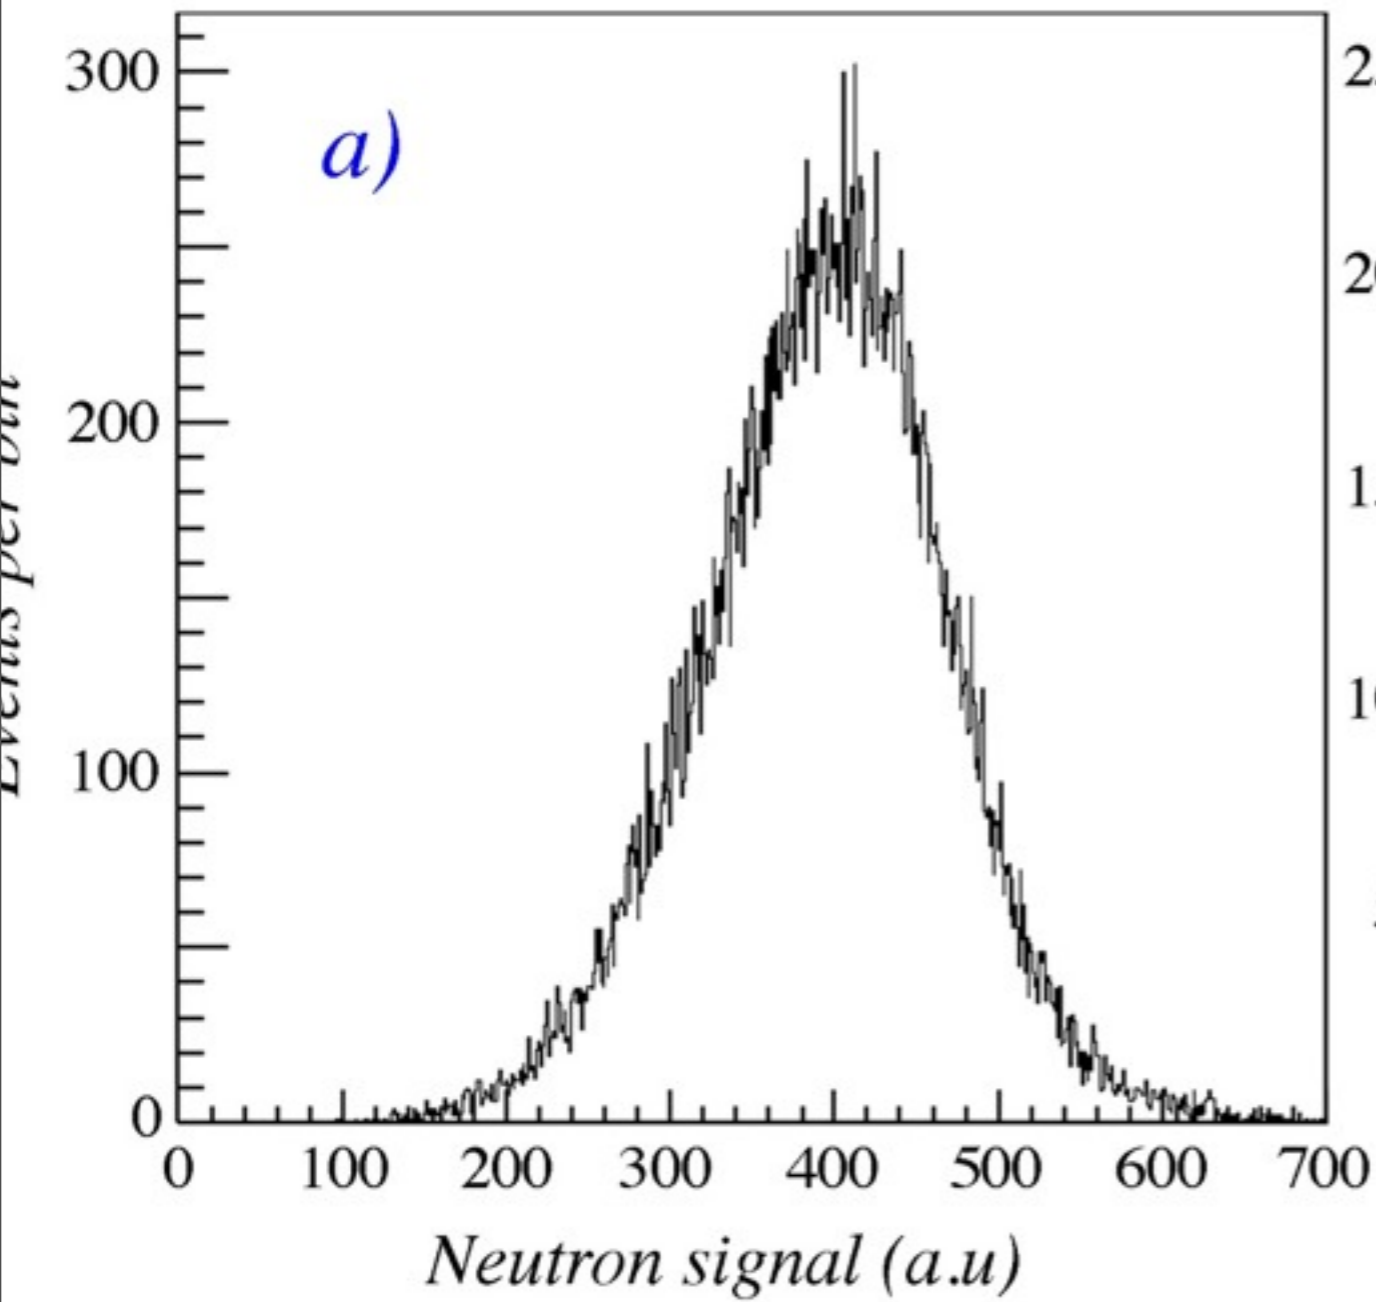

$$fn = E_n \text{ (EM energy units)} / 200 \text{ GeV}$$

# Resolution (rms width of response) and constant term are both improved

